

Existing parapet flashing must be cut away to allow termination against substrate

Termination Bar and approved fasteners spaced 6 in. (152 mm) on center

Approved sealant

Parapet flashing

Approved plates/fasteners (Note 2)

Duro-TECH™ membranes

Field weld (Note 4)

Approved insulation, cover board, and/or vapor barrier (Note 5)


Deck

Approved caulk

8 in. (203 mm) min. (Note 3)

Approved slip sheet

Existing roofing system

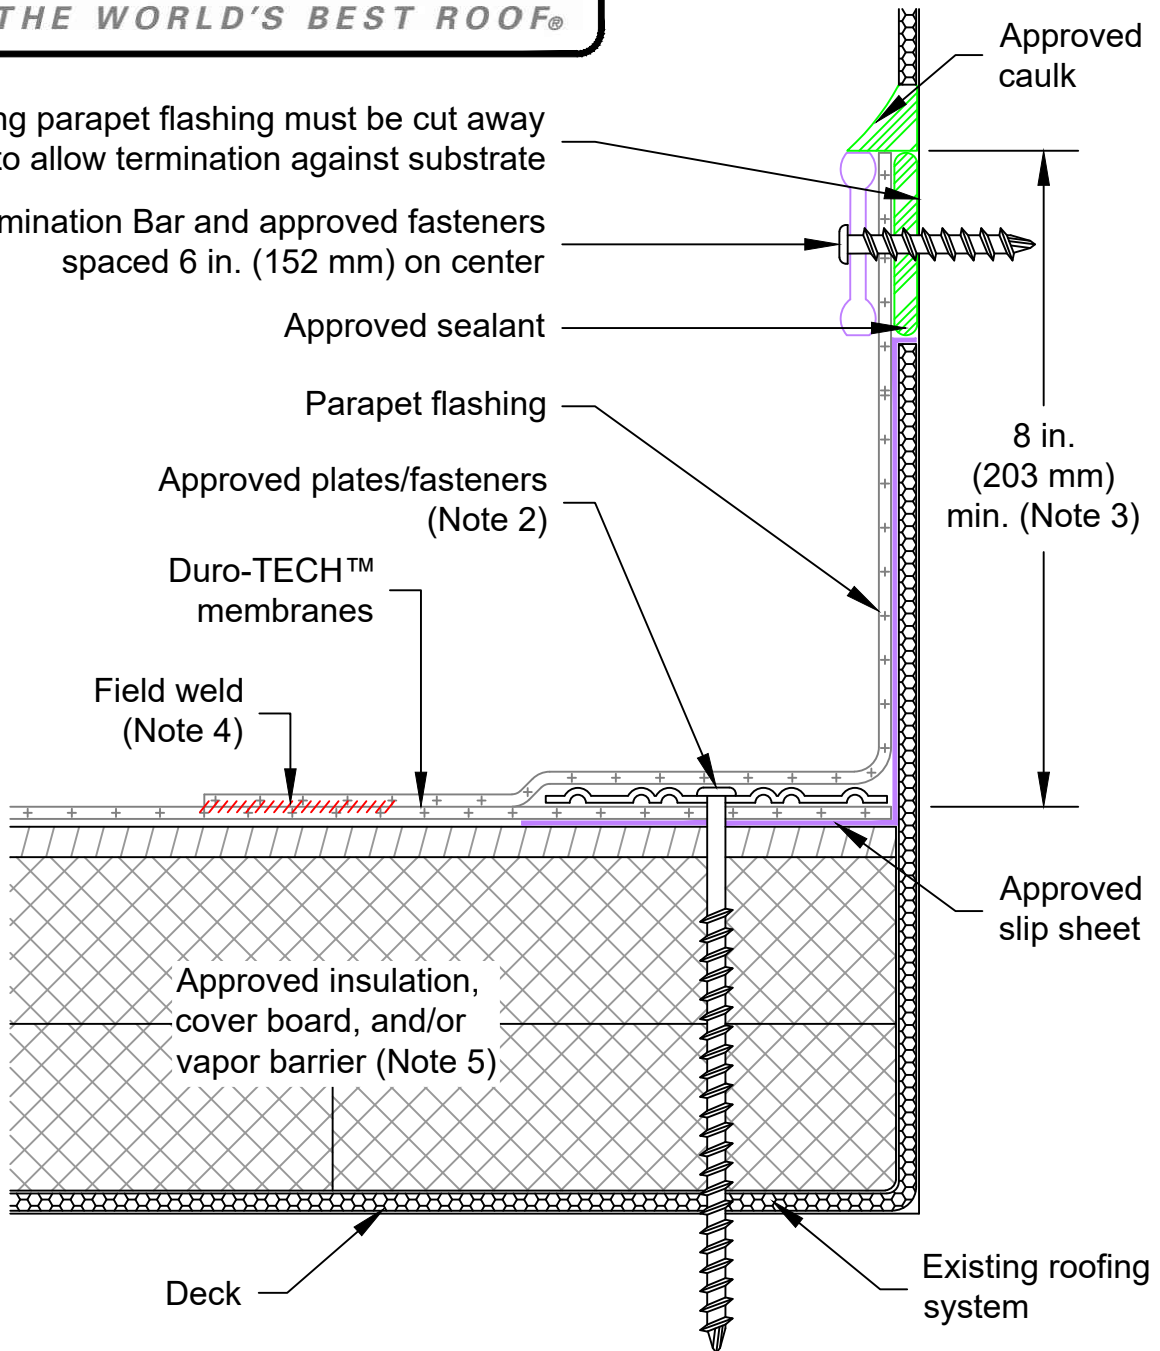

Note 1: 1-3/4 or 4 in. (45 or 102 mm) Fascia Bar and Cover (cover optional) may be used in place of Termination Bar.

Note 2: Membrane fastening at deck-to-parapet transitions and walls shall be same as per respective zones that area is located within (field, perimeter, corner).

Note 3: Refer to Detail TRG6012 for row spacing when membrane exceeds 28 in. (711 mm).

Note 4: All field welds must be a minimum of 1-1/2 in. (40 mm) wide.

Note 5: Refer to specifications for vapor barrier, insulation, and cover board requirements.

REVISED: N/A	TPO PARAPET DETAIL FOR MECHANICALLY FASTENED SYSTEMS
PREVIOUS: 05/21/2025	TERMINATION INTO EXISTING SYSTEM
SCALE: NONE	NEW CONSTRUCTION OR RE-ROOF