


RETRO-R® ROOF AND WALL PANEL

DESCRIPTION:

The Retro-R® Roof and Wall Panel is an excellent choice for retrofit construction. This panel can be applied directly over an existing PBR or R panel to give your building a new look and longer life. Retro-R is an exposed fastener system with a membrane on the back side to prevent rust from the old roof from transferring to the new panel.

SPECIFICATIONS:

- Applications: Roof and Wall
- Coverage Widths: 36"
- Rib Spacing: 12" on center
- Rib Height: 1-1/16"
- Minimum Slope: 1/2:12
- Panel Attachment: Exposed Fastening System
- Gauges: 29 (standard); 26 (optional)
- Finishes: Smooth (standard)
- Coatings: Galvalume® Plus, Signature® 200

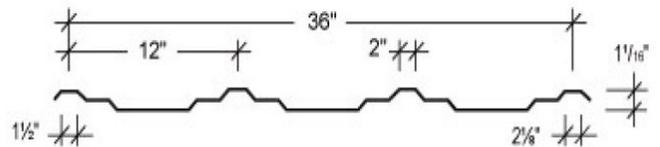

Product samples, detail sheets, color chips, and color chart are available for your submittal package. For assistance with questions or submittals, contact your local Sale Representative or call Duro-Last.

Category	Characteristic	Test Method	Purpose	Result
STRUCTURAL	Uplift Resistance	ASTM E1592	Provides a standard procedure to evaluate or confirm structural performance under uniform static air pressure difference	See Load Chart Section*
	Gravity Loads	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section*
ROOF LISTINGS	Roof performance Florida approval	ASTM 1592	Florida product approval is the approval of products and systems, which comprise the building envelope and structural frame, for compliance with the structural requirements of the Florida Building Code.	See FL #21121.1