


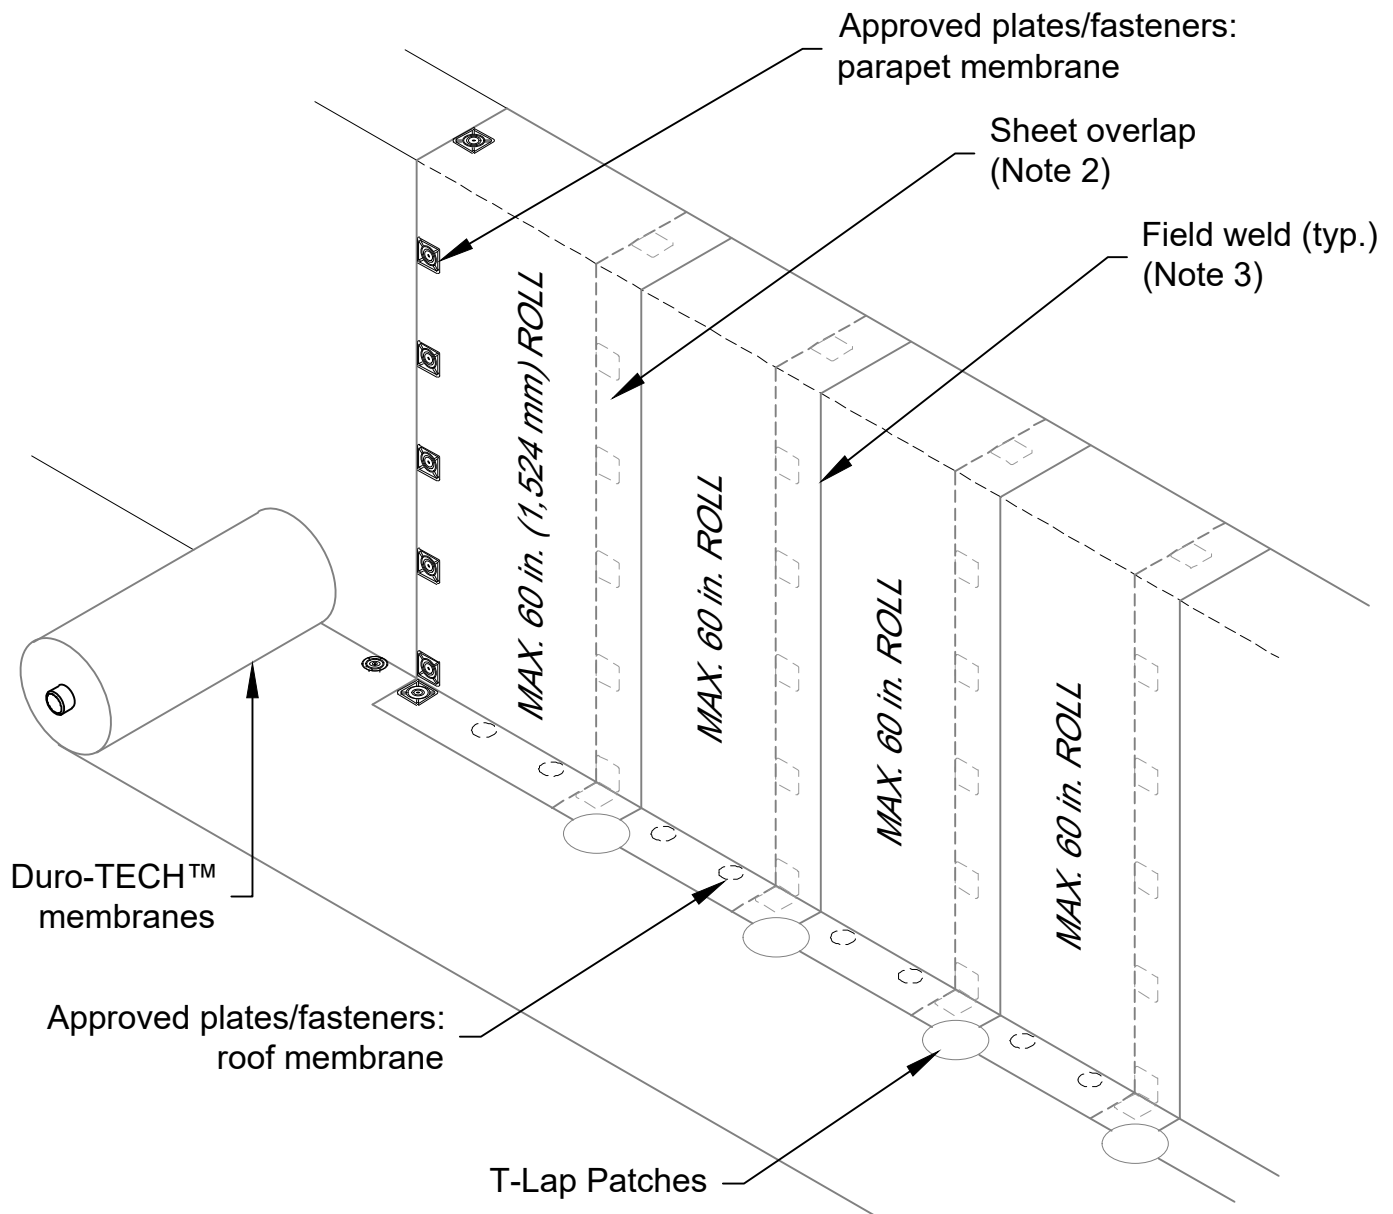

Note 1: Refer to the *Duro-TECH™ TPO Mechanically Fastened Roofing System* specification for the fastener spacing requirements on the wall and roof deck. Fastener spacing for wall membrane will be same as perimeter and corner fastening requirements for deck membrane.

Note 2: Overlap wall sheets a minimum of 6 in. (152 mm).

Note 3: All field welds must be a minimum of 1-1/2 in. (40 mm) wide.

REVISED: N/A	TPO PARAPET DETAIL FOR ROLL GOOD MECHANICALLY FASTENED SYSTEMS
PREVIOUS: 07/09/2026	PARAPET FLASHING - VERTICAL FASTENING
SCALE: NONE	NEW CONSTRUCTION OR RE-ROOF