


SNAP COPING

DESCRIPTION:

Snap Coping offers a complete finish to any parapet wall with no exposed fasteners. The system utilizes 16-gauge cleat segments spaced at 60" on-center.

- Available in 10' lengths; widths are customized to fit the wall.
- 16" cleat segments are fabricated in 16-gauge galvanized.
- 6" concealed splice plate eliminates exposed fasteners and allows for thermal movement.
- Riveted inside and outside miters and end caps are available.
- Minimum 4" face, 8" top, 3" back.
- ANSI/SPRI ES-1 compliant up to 16" width.
- Meets TAS 111-95 Test with 12" wall dimension, 4" face and 3" back.

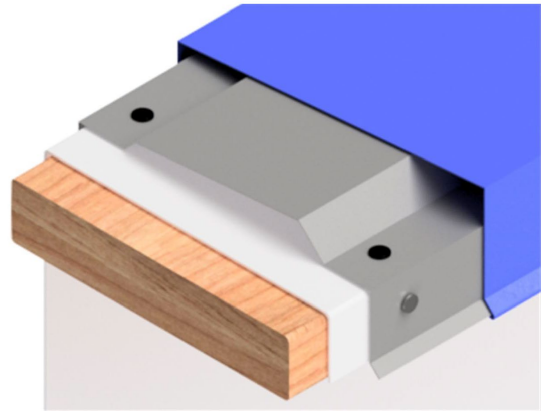

INSTALLATION:

1. A wood nailer is required on top of the parapet wall. The wood nailer should be attached in accordance with ANSI/SPRI ES-1.
2. Install in accordance with Duro-Last Detail #6054 and Installation #6054.
3. Any deviation from the requirements set forth in detail drawings must be pre-approved, in writing, by the Duro-Last Technical Department.

WARRANTY:

Duro-Last offers a finish and substrate warranty.

Material	Gauge	Finish
Aluminum	.040	Mill or Kynar®
Stainless Steel	24-gauge	N/A
Bonderized Steel	24-gauge	N/A
Galvalume®	24-gauge	Mill or Kynar®