

FW-120 CONCEALED FASTENING WALL SYSTEM

DESCRIPTION:


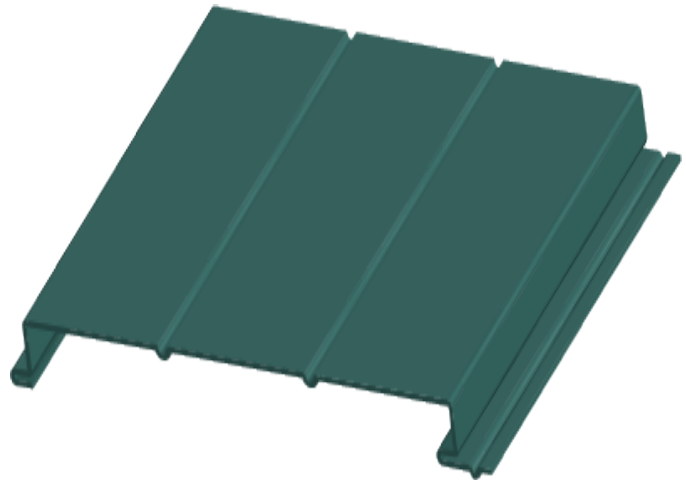
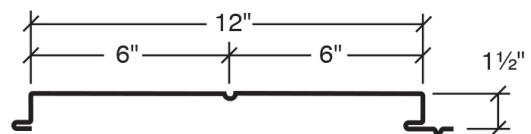
The FW-120 panel is a concealed fastener wall and liner panel that provides a flat appearance. FW-120 is commonly used for architectural, commercial and industrial markets. The heavy gauge offering provides for large spanning capabilities, particularly in composite wall applications.

FEATURES:

- FW-120 is available in a flat profile with no beads, one bead, or two beads.
- The FW-120 panel has been tested by a certified independent laboratory in accordance with ASTM test procedures for Air Infiltration and Water Penetration at the sidelap. Test results show no air leakage at 1.57PSF and no water penetration at 6.24PSF differential pressure.
- FW-120 carries Florida approval.

SPECIFICATIONS:

- Applications: Wall and Fascia
- Coverage Widths: 12"
- Panel Attachment: Concealed Fastening System
- Gauges: 24 (standard); 22 and 20 (optional)
- Finishes: Smooth (standard); Embossed (optional)
- Coatings: Signature® 300, Signature® 300 Metallic

**FW-120-0****FW-120-1
with Bead**

Product samples, detail sheets, color chips, and color chart are available for your submittal package. For assistance with questions or submittals, contact your local Sale Representative or call Duro-Last.

Category	Characteristic	Test Method	Purpose	Result
ENVIRONMENTAL	Air Leakage	ASTM E283	Determines the air leakage rates of exterior windows, curtain walls, and doors under specified air pressure differences across the specimen	0.000 cfm/ft ² at 6.24 psf static pressure 0.113 cfm/ft ² at 20.00 psf static pressure
	Water Penetration	ASTM E331	Determines the resistance of exterior windows, curtain walls, skylights, and doors to water penetration when water is applied under uniform static air pressure difference	No uncontrolled water penetration through the panel joints at a static pressure of 13.24 psf
STRUCTURAL	Negative Wind Loads	ASTM E1592	Provides a standard procedure to evaluate or confirm structural performance under uniform static air pressure difference	See Load Chart Section*
	Positive Wind Load	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section*
ROOF LISTINGS	Roof Performance-Florida Approval	ASTM E 1592	Florida product approval is the approval of products and systems, which comprise the building envelope and structural frame, for compliance with the structural requirements of the Florida Building Code	See FL #11917.3