


Tab Sealer 4725 applied 6 inches onto fastening tab and 6 inches onto underside of membrane next to weld

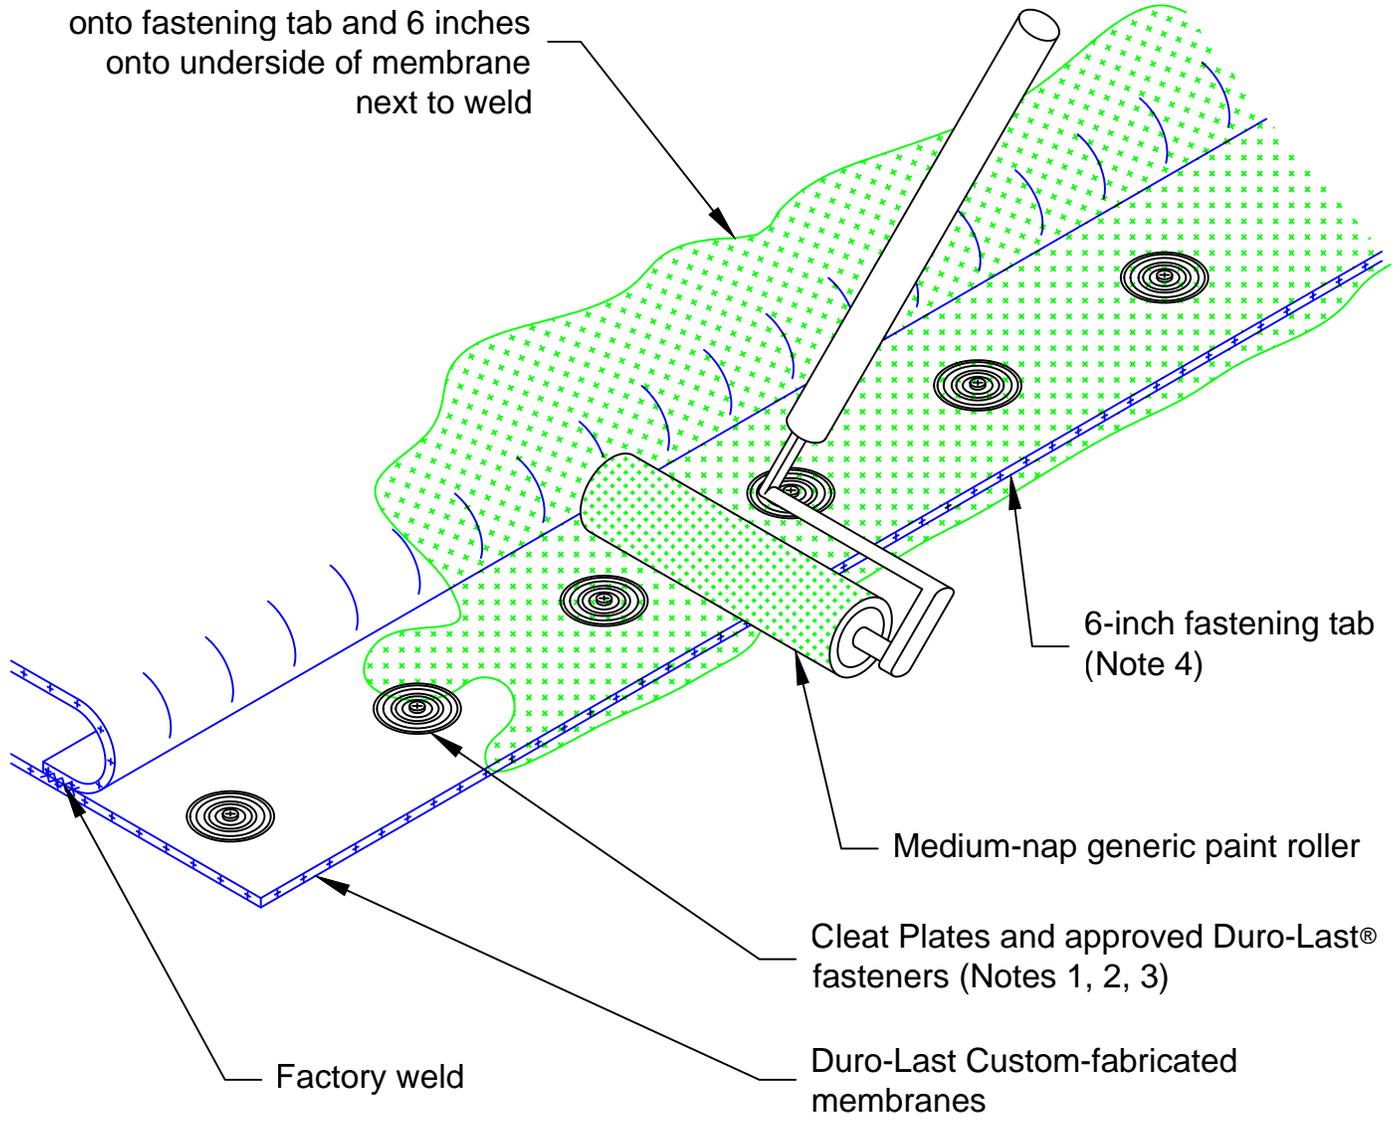

6-inch fastening tab (Note 4)

Medium-nap generic paint roller

Cleat Plates and approved Duro-Last® fasteners (Notes 1, 2, 3)

Duro-Last Custom-fabricated membranes

Factory weld

- Note 1: Cleat Plates must be used for Duro-Roof® roof tabs.
- Note 2: Cleat Plates and approved Duro-Last fasteners must be centered along 6-inch wide fastening tabs.
- Note 3: Refer to *Duro-Roof Roofing System* specification for fastening requirements.
- Note 4: The Duro-Roof Roofing System must utilize 6-inch fastening tabs.

REVISED: 04/28/2017	GENERAL DETAIL FOR DURO-ROOF® ROOFING SYSTEM
PREVIOUS: 04/11/2014	DURO-ROOF ADHESIVE APPLICATION
SCALE: NONE	NEW CONSTRUCTION OR RE-ROOF