

# DURO-LAST<sup>®</sup> INSIDE AND OUTSIDE CORNERS

## DESCRIPTION:

Duro-Last<sup>®</sup> Inside and Outside Corners are to be used in corner areas encountered on a roofing project. The corners are made with Duro-Last specially formulated roofing membrane. The combination of reinforced membrane and prefabrication ensures a long lasting, watertight flashing.


Inside and outside corners are available in white, tan, gray and dark gray colors as well as in the Designer Series membranes (slate gray Shingle-Ply, sandstone Shingle-Ply and Rock Ply). They can be ordered in 6 x 6 in. (152 x 152 mm) or 6 x 18 in. (152 x 457 mm) sizes.

## INSTALLATION:


1. Prefabricated inside and outside corners shall be heat welded (hot-air) to the field membrane and/or parapet flashings.
2. The use of outside corners is required but the use of inside corners is optional depending on the configuration of the flashing membrane.
3. Refer to detail 1180 for additional information.

## NOTE:


- Inside and outside corners are manufactured from Duro-Last membrane and shall be furnished by Duro-Last Roofing, Inc.
- Outside corners must be manufactured by Duro-Last.
- Inside corners may be fabricated in the field or purchased from Duro-Last Roofing, Inc.
- Butterfly corners are also available for use as shown in the drawing on the right.

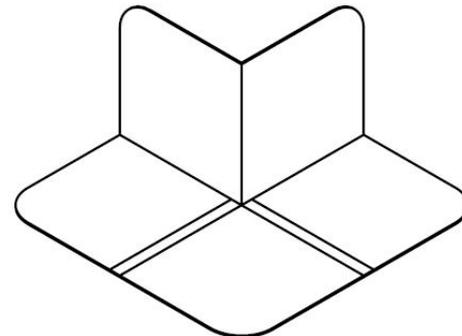

OUTSIDE CORNER

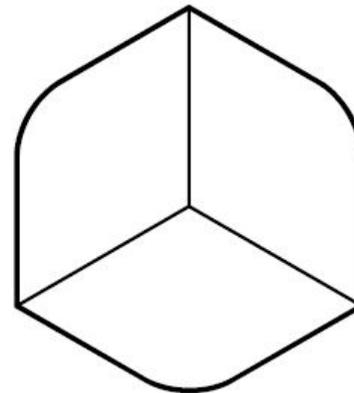

INSIDE CORNER

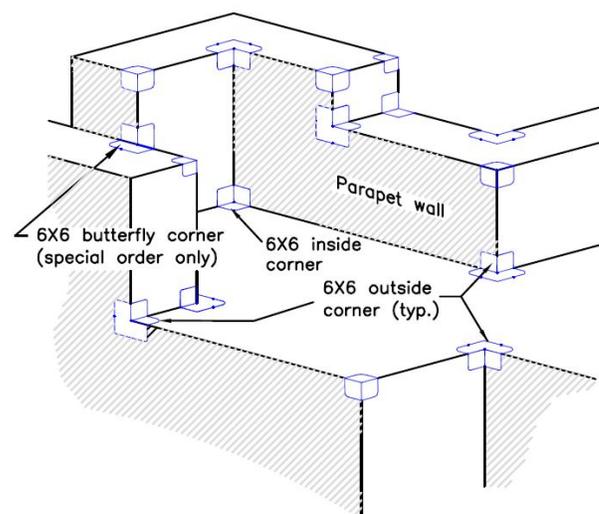

LOCATIONS TO USE CORNERS