


# DURO-LAST® DRAIN BOOT

## DESCRIPTION:

Duro-Last® prefabricated Drain Boots can be used in most circular roof drains and are especially useful in reroofing applications. They are fabricated from Duro-Last's specially formulated roofing membrane. The combination of reinforced membrane and prefabrication ensures a long lasting, watertight flashing.

The sleeve of the drain boot is a different color than the base to differentiate it from Duro-Last Stack Flashings. The base is available in white, tan, gray, dark gray and terra cotta as well as in the Designer Series membranes (slate gray Shingle-Ply™, sandstone Shingle-Ply™ and Rock-Ply™) and are usually ordered to match the roof membrane.

Drain boots are prefabricated 12 inches (305 mm) in depth. Special orders are available upon request.

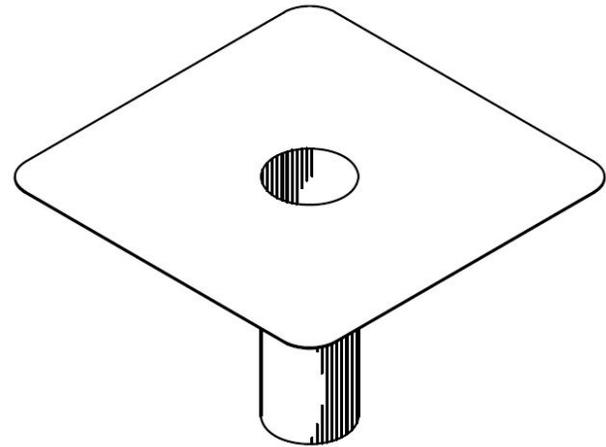

Drain Boot  
(Install per detail drawing 2020)

## INSTALLATION:

1. The roof membrane installed around the drain must be fastened prior to installing the drain boot flashing. Use the same fastener spacing that was used to install the roof membrane but do not exceed 18 inches (457 mm) on center. A minimum of one fastener must be installed.
2. Apply Duro-Caulk® Plus to the outside of the drain boot before it is inserted into the drain pipe.
3. Once inserted, the drain boot shall be heat welded (hot-air) to the field membrane.
4. A pair of expandable composite drain rings (CDR) should then be installed as low into the drain boot as possible, with a minimum depth of 6 inches (152 mm).
5. Sealant and CDRs must be installed at the same depth in the drain.
6. Refer to detail 2020 for installation information.

DRAIN BOOT DIMENSIONS	
(All sizes have 24 x 24 in. (610 x 610 mm) base)	
DRAIN DIAMETER	SLEEVE DIAMETER
2 in. (51 mm)	1.875 in. (48 mm)
3 in. (76 mm)	2.875 in. (73 mm)
3.5 in. (89 mm)	3.25 in. (83 mm)
4 in. (102 mm)	3.875 in. (98 mm)
4.5 in. (114 mm)	4.25 in. (108 mm)
5 in. (127 mm)	4.875 in. (149 mm)
5.5 in. (140 mm)	5.25 in. (133 mm)
6 in. (152 mm)	5.875 in. (149 mm)
6.5 in. (165 mm)	6.25 in. (159 mm)
7 in. (178 mm)	6.875 in. (175 mm)
7.5 in. (191 mm)	7.25 in. (184 mm)
8 in. (203 mm)	7.875 in. (200 mm)