

DURO-LAST[®] 2-INCH DRAIN ADAPTER

DESCRIPTION:



Duro-Last[®] prefabricated 2-inch (51 mm) Drain Adapters are fabricated from Duro-Last specially formulated roofing membrane and a ¼ inch (6.3 mm) thick compression ring made from recycled membrane. Drain Adapters may be used for circular or small rectangular roof drains and are useful in reroof applications. They are available in white, tan, gray, dark gray and terra cotta as well as in the Designer Series membranes (slate gray Shingle-Ply™, sandstone Shingle-Ply™ and Rock-Ply™) and are usually ordered to match the roof membrane.

INSTALLATION:

1. The Drain Adapter shall be heat welded (hot-air) to the field membrane.
2. Install 8 fasteners, spaced equally around the Drain Adapter, to secure the ¼ inch (6.35 mm) thick compression ring, through the field membrane and sealant, to the deck.
3. Refer to detail 2050 for additional information.

NOTE:

- This product cannot be used on drains larger than 2 inches (51 mm) in diameter.
- Drain Adapters are manufactured from Duro-Last roofing membrane and shall be furnished by Duro-Last, Inc.

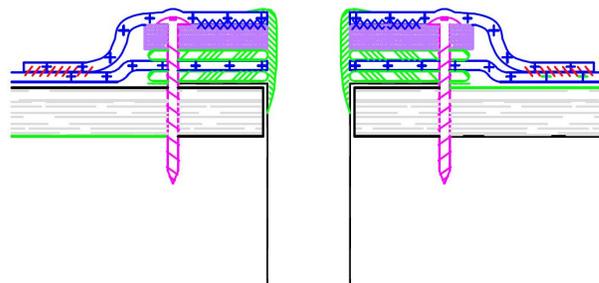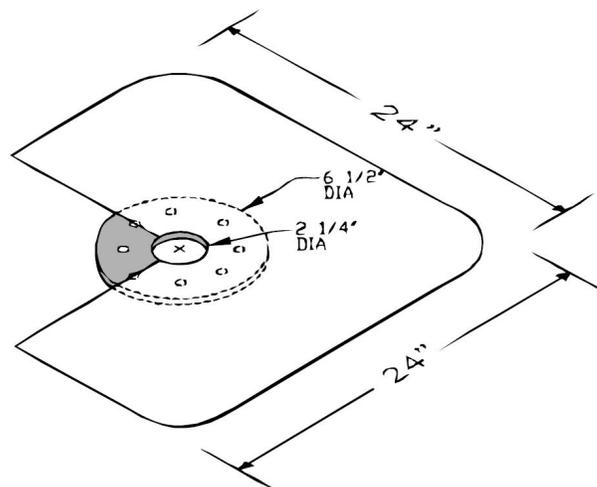

2-inch Drain Adapter
(Install per detail drawing 2050)