


# DURO-LAST<sup>®</sup> HD SCREWS

**DESCRIPTION:**

Duro-Last<sup>®</sup>, Inc. requires the use of Duro-Coated Screws for mechanical fastening of the Duro-Last roofing system. Duro-Last HD Screws are #14 diameter, are equipped with a P-3 truss head and are available with either a drill point or a spade point.

Duro-Last HD Screws can be used in most types of roofing applications. These Duro-Coated Screws must pass twice the FM 4470 standard for corrosion resistance, totaling 30 cycles in a Kesternich cabinet. Duro-Last, Inc. also requires that all Duro-Coated Screws pass 20° and 40° bend tests (hardness) and be able to penetrate a 20 gauge deck in under three seconds with a 50 lb. (222 N) load.

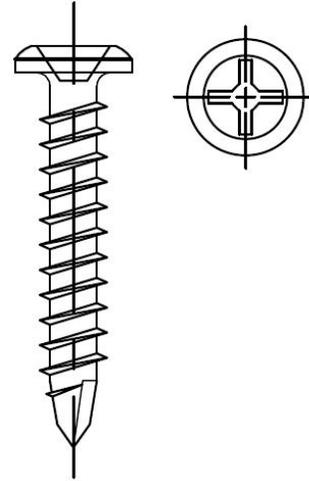

**INSTALLATION:**

1. Penetration into all approved deck types is 1 inch (25 mm) minimum, from the top surface of the deck.

**NOTE:**

- Duro-Last, Inc. stocks HD screws in the sizes noted in the table to the right. Additional sizes are available on a drop ship basis. Please allow adequate time for ordering and delivery of special orders.

HD SCREW DIMENSIONS		
Length	Thread Length	Quantity per Bucket
1.5 in. (38 mm)	1.5 in. (38 mm)	2,000
2 in. (51 mm)	2 in. (51 mm)	2,000
2.5 in. (64 mm)	2.5 in. (64 mm)	1,000
3 in. (76 mm)	3 in. (76 mm)	1,000
3.5 in. (89 mm)	3 in. (76 mm)	1,000
4 in. (102 mm)	3 in. (76 mm)	1,000
4.5 in. (115 mm)	3 in. (76 mm)	1,000
5 in. (127 mm)	4 in. (102 mm)	1,000
5.5 in. (140 mm)	4 in. (102 mm)	1,000
6 in. (152 mm)	4 in. (102 mm)	1,000
7 in. (178 mm)	4 in. (102 mm)	500
8 in. (203 mm)	4 in. (102 mm)	500
9 in. (229 mm)	4 in. (102 mm)	500
10 in. (254 mm)	4 in. (102 mm)	500
11 in. (279 mm)	4 in. (102 mm)	500
12 in. (305 mm)	4 in. (102 mm)	500