

DURO-LAST[®] DURO-BLUE SEPARATION SLIP SHEET

DESCRIPTION:

Duro-Last[®] Duro-Blue[®] is a separation slip sheet for use with the Duro-Last roofing system. It is made from a coextruded polyethylene film.

The Duro-Blue separation slip sheet is chemical-resistant and has excellent weatherability characteristics. It is highly resistant to mildew. Since it is made of inert organic materials it does not provide nutritive value to plants, animals, or microorganisms.

The Duro-Blue separation slip sheet may be used as a separation layer placed between the Duro-Last roof membrane and incompatible materials such as single-ply roof membranes, expanded polystyrene (EPS), extruded polystyrene (XPS), and styrene-based facers on insulation. Duro-Blue must not be used over any type of built-up roofing (BUR), modified bitumen or asphalt-based products. It may be used on smooth roof decks, walls, and curbs. Duro-Blue is intended to be used as a separation layer, not as a waterproofing material.


The Duro-Blue separation slip sheet has a minimum thickness of 4 mils (0.10 mm). It is delivered on a 5 ft. (1.5 m) long tube.

MATERIAL SAFETY DATA SHEET:


Product: Duro-Blue separation slip sheet

INSTALLATION:


1. Attach the Duro-Blue separation slip sheet with as many fasteners as are necessary to hold it in place.
2. Only Duro-Last approved fasteners and plates may be used.
3. Overlap sections of Duro-Blue by 6 inches (15 cm) on all edges.

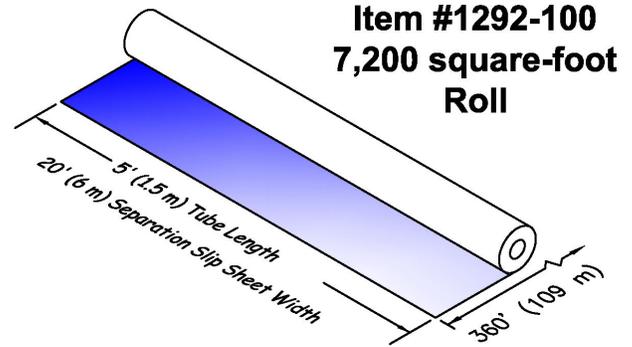

**Item #1292-100
7,200 square-foot
Roll**

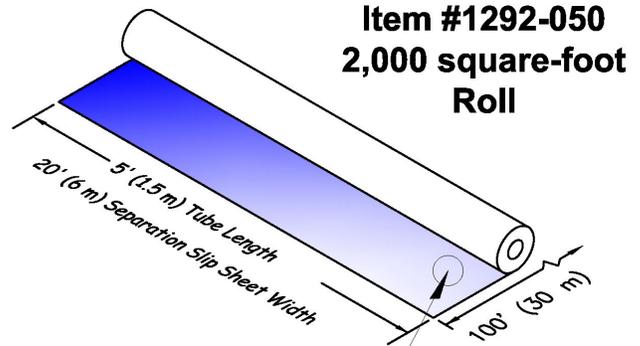

**Item #1292-050
2,000 square-foot
Roll**

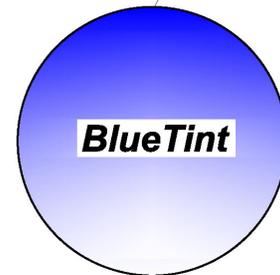

Item#	Width	Length	Total Size	Coverage w/6" overlap	Roll Weight	Thickness (minimum)	Water Vapor Transmission	Color
1292-100	20 ft. (6 m)	360 ft. (110 m)	7,200 sq.-ft. (669 sq.-m)	7,000 sq.-ft. (650 sq.-m)	139 lb. (63 kg)	4 mils (0.09 mm)	0.15 (g/100 in ² /day)	Blue Tint
1292-050	20 ft. (6 m)	100 ft. (30.5 m)	2,000 sq.-ft. (185 sq.-m)	1,950 sq.-ft. (181 sq.-m)	40 lb. (18 kg)	4 mils (0.09 mm)	0.15 (g/100 in ² /day)	Blue Tint