

# DURO-LAST® EV 50-MIL MEMBRANE

**ADVANTAGES:**

Duro-Last® EV 50-Mil (EV50) is an excellent choice for low-slope roof projects requiring a long lasting, energy efficient roofing membrane. The inclusion of DuPont™ Elvaloy® KEE (Ketone Ethylene Ester) provides Duro-Last EV with superior physical properties and performance characteristics. A complete line of custom-fabricated accessories is available for use with EV50.

**DESCRIPTION:**

Duro-Last EV membrane incorporates a weft-inserted, knitted scrim within KEE-containing films to provide exceptional strength and waterproofing.

**KEE-Containing Film** – Proprietary thermoplastic KEE-containing formulation of resins, plasticizers, stabilizers, biocides, flame retardants and U.V. absorbents.

- PVC film above weft-inserted scrim – 25 mil, nominal

**Weft-Inserted Scrim** – An 18 x 9 polyester fabric construction with weft insertion provides superior tear and puncture resistance. The polyester thread is treated to prevent wicking.


**Total Thickness** – 50 mil, nominal

**Weight** – 0.28 lb/ft<sup>2</sup>

**Color** – Top and bottom surface: white

**R-Value** – 0.1 R (0.1 ft<sup>2</sup>·°F·hr/Btu).

**Packaging** – EV50 is supplied in the roll sizes shown below. A full pallet contains 10 rolls.

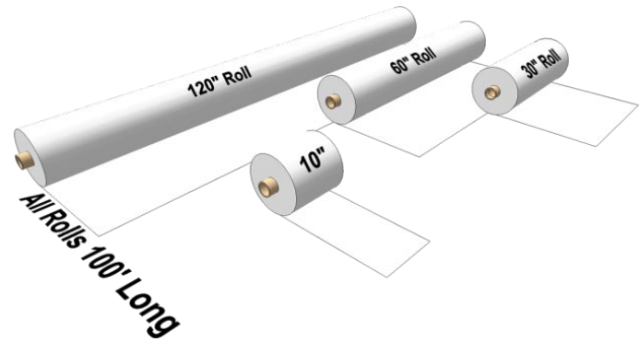

ROLL DIMENSIONS		
Dimensions	Approximate Coverage	Approximate Weight
	6" Overlap <sup>1</sup>	
120 in. x 100 ft	950 ft <sup>2</sup>	280 lb
60 in. x 100 ft	450 ft <sup>2</sup>	140 lb
30 in. x 100 ft	200 ft <sup>2</sup>	70 lb
10 in. x 100 ft	Stripping	24 lb

<sup>1</sup> 6-inch overlap and use of Duro-Last Poly or Cleat Plates®.

**Overlap Line** – A line, 6 inches from one edge of the sheet, is factory-applied to the top of the sheet to assist in maintaining proper overlap between sheets.

**Seam Plate and Fastener Placement Guides** – “X”s are placed at 6-inch intervals along one edge of the sheet to assist in maintaining proper spacing between fasteners. Install fasteners so that the outside edge of the seam plate is flush with the edge of the sheet.

**“T-Lap” Patches** – A patch, with rounded corners, is required at all lap areas where 3 or more layers of membrane intersect (“T-Lap”). The minimum size of the patch is 4 x 4 inches or 4-inch diameter. Patches can be made of either EV50 or EV60.

**STORAGE:**

Store rolls lengthwise on pallets. Use tarps to keep rolls dry.

**ENERGY EFFICIENCY:**

White EV50 is an excellent product for complying with California Title 24, LEED® and other energy efficiency programs requiring the use of a highly reflective roof membrane.

COOL ROOF RATING COUNCIL (CRR)							
Color	CRR ID	Solar Reflectance		Thermal Emittance		Solar Reflective Index (SRI)	
		Initial	3-yr	Initial	3-yr	Initial	3-yr
White	0610-0011	0.86	0.71	0.89	0.88	108	87

**LEED-NC & LEED-EB Credits** – White EV50 alone can obtain 1 credit in either U.S. Green Building Council’s LEED-NC or LEED-EB programs. In combination with other design criteria the membrane may help attain other credits.

LEED CREDITS	
LEED-NC Credit Category	Duro-Last Attribute
Sustainable Sites Heat Island Reduction	Solar Reflective Index (SRI) = 108
LEED-EB Credit Category	Duro-Last Attribute
Sustainable Sites Heat Island Reduction	Solar Reflective Index (SRI) = 108

**CODES AND STANDARDS:**

Underwriters Laboratories (US & Canada), UL Evaluation Report (ER10128), FM Approvals, State of Florida, Miami-Dade County, Texas Department of Insurance.

**WARRANTY:**

The following warranties are available for projects utilizing EV50. Contact Duro-Last for warranty details.

**Consequential damage coverage is not available for Duro-Last EV installations.**

AVAILABLE WARRANTIES		
Supreme	Not applicable for this product	
Ultra	15-Year NDH High Wind Warranty	20-Year NDH High Wind Warranty
Basic	15-Year NDH Warranty	20-Year NDH Warranty
Residential	15-Year Residential Material Limited Warranty	20-Year Residential Material Limited Warranty

**MEMBRANE ATTACHMENT:**

**Mechanically Fastened** – EV50 may be mechanically fastened to a variety of roof deck and wall materials. An appropriate slip sheet, insulation or cover board may be required. Refer to the Duro-Last Roll Good Mechanically Fastened Roofing System Specification for system requirements.

**Induction welded** – Induction welding may be used to attach EV50. An appropriate slip sheet, insulation or cover board may be required. Refer to the Duro-Bond® Induction Weld Roofing System Specification for system requirements.

**Adhered** – EV50 may be adhered to a variety of properly prepared roof decks, walls, cover boards and insulations. Refer to the Adhered Roofing System Specification for system requirements. EV50 must not be adhered with Duro-Last Solvent-Grip® Spray Adhesive.

**PHYSICAL PROPERTIES:**

EV50 has been subjected to the tests required by ASTM D4434 “Standard Specification for Poly (Vinyl Chloride) Sheet Roofing” and has been classified as a Type III, internally reinforced sheet. EV50 also meets or exceeds all ASTM D4434 Type II requirements.

The results of each test are listed below. ASTM’s Overall Thickness requirements for the membrane are plus or minus 10% (nominal) of the listed Typical Value.

EV50 PHYSICAL PROPERTIES				
Physical Property	Test Method	ASTM D4434 Requirement	Result	Typical Value
Overall Thickness	ASTM D751	≥ 0.045 and ≤ 0.055 in. (≥ 45 and ≤ 55 mil)	PASS	0.050 in. (50 mil), nominal
Thickness Over Scrim	ASTM D7635	≥ 0.016 in.	PASS	0.025 in. (25 mil)
Breaking Strength <sup>1</sup>	ASTM D751 Grab Method	≥ 200 lbf./in.	PASS	458 x 282 lbf./in.
Elongation <sup>1</sup>	ASTM D751 Grab Method	≥ 15%	PASS	33% x 27%
Seam Strength	ASTM D751 Grab Method	≥ 343 lbf. (75% of Breaking Strength.)	PASS	458 lbf.
Tear Strength <sup>1</sup>	ASTM D751 Procedure B	≥ 45 lbf.	PASS	67 x 152 lbf.
Low Temp. Bend	ASTM D2136	Must pass at -40° F.	PASS	PASS
Heat Aging	ASTM D3045	Conditioned for 56 days in oven maintained at 176° F.	PASS	PASS
Accelerated Weathering	ASTM G155	10,000 hours total test time. Irradiance level of 0.35 W/m <sup>2</sup> -340nm. Cycle: 102 minutes light, 18 minutes light + H <sub>2</sub> O spray, 63±2.5° C black panel, 30±5% RH	PASS	PASS
Dimensional Stability <sup>1</sup>	ASTM D1204	Conditioned for 6 hours in oven maintained at 176° F. Allowable change: ≤ 0.5%	PASS	0.14% x 0.05%
Water Absorption	ASTM D570	Immersed in water at 158° F for 168 hours. Allowable weight change: ≤ 3%	PASS	PASS
Static Puncture	ASTM D5602	≥ 33 lbf.	PASS	PASS
Dynamic Puncture	ASTM D5635	≥ 14.7 ft-lbf. (20 J)	PASS	PASS

<sup>1</sup> Typical values are shown for both machine and cross machine directions. The machine direction results are listed first.

ADDITIONAL TESTS		
Fungi Resistance	ASTM G21	No Sustained Growth or Discoloration
Moisture Vapor Transmission	ASTM E96, Proc. B, Method A	< 0.35 U.S. perms



Duro-Last, the “World’s Best Roof”, Duro-Fleece, Duro-Tuff, Cleat Plate, Solvent-Grip, and Duro-Bond are trademarks in the Amrize portfolio. All other trademarks are property of their respective owners.