

High Profile™ (HP Fascia)

Description:

The High Profile™ (HP Fascia) system features an elevated profile to contain water and/or ballast. It is quick and easy to install with a crimping attachment for unmatched securement.

- Water dam and fascia are fabricated in 10' lengths; 4-1/2" – 8" widths.
- Concealed splice plate design provides a more pleasing appearance than standard cover plates or splice joints.
- Pre-punched fastening holes in the Galvalume® water dam ensure correct fastener placement and spacing.
- Ready to assemble inside and outside corners are available.




Energy Efficiency:

LEED® and ENERGY STAR® compliant.

Installation:

1. A wood nailer is required if 1" or greater of insulation is used.
2. This nailer should be attached to the wall in accordance with ANSI/SPRI ES-1 3.9.
3. Install in accordance with EXCEPTIONAL® Metals Detail #E3590.
4. Any deviation from the requirements set forth in detail drawings must be pre-approved, in writing, by the EXCEPTIONAL Metals Technical Department.

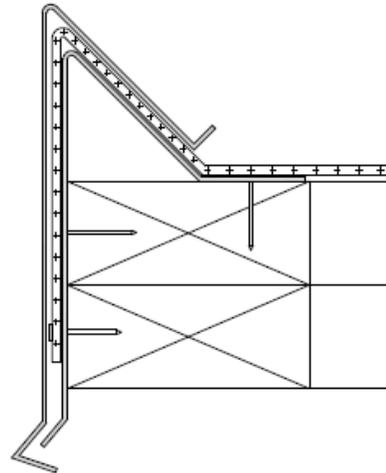

Codes and Standards:

- ANSI/SPRI ES-1 compliant.

Warranty:

EXCEPTIONAL Metals offers a finish and substrate warranty. Contact the membrane manufacturer for any additional warranty that may be offered.

Material	Gauge	Finish
Stainless Steel	24-gauge	N/A
Bonderized Steel	24-gauge	N/A
Galvalume®	24-gauge	Mill or Kynar®

Technical Services:

Product samples, detail sheets, color chips, and color chart are available for your submittal package. For assistance with questions or submittals, contact your local representative or call EXCEPTIONAL Metals.