

U-ANCHOR™ U2400

For Mechanically Fastened Systems

DESCRIPTION:

The U-Anchor™ U2400 is a single-bolt attachment designed for multi-use rooftop systems with all Duro-Last®, Inc. membranes. Each bolt is secured to a 2000 series plate and factory-welded to a square membrane skirt.

The plate can be mechanically fastened to the deck/parapet with fasteners approved by a project engineer and the membrane skirt is welded to the deck/parapet membrane with a continuous 1-1/2 inch weld for waterproofing.

TYPICAL USES:

- Solar anchor
- Rooftop support
- Lightning arrester anchor

PRODUCT SPECIFICATIONS:Bolt

- 3/8" – 16 x 1.5"
(Diameter) – (Thread Count) x (Bolt Length)
- Material Type: 304 stainless steel

Plate

- Dimension: 5.5" diameter
- Fastener Hole Diameter: 0.265" (8 holes)
- Fastener Hole Pattern: 4.125" diameter
- Material Thickness: 0.047"
- Material Type: galvanized steel G90

Membrane Skirt

- Dimensions: 11.75" x 11.75"
- Type: 50 mil Duro-Last* **
- Color: white*

* Custom options may be available for an additional charge. Lead times may vary.

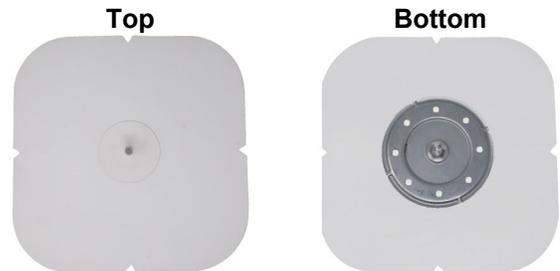
** Do not use Duro-Last EV membrane with any other membrane type.

ORDERING:

U2400 can be ordered individually.

- Product as listed above (Item #1242-240)***
 - Weight: 0.36 lb.

*** Refer to Product Specifications for custom options.

**STORAGE AND HANDLING:**

- Store product out of direct sunlight on elevated pallets.
- Always store in a dry location protected from the elements.

PRECAUTIONS:

- Wear proper personal protective equipment, such as gloves and eye protection.

INSTALLATION:

1. U2400 Attachment
 - a. Fastener selection and quantity are dictated by the system assembly, attachment requirements, deck/parapet type, and the project engineer.
 - b. Utilizing the holes provided, mechanically fasten the plate with the specified type and quantity of fasteners to the deck/parapet or structure.
 - c. Hot-air weld the membrane skirt to the deck/parapet membrane with a continuous 1-1/2 inch weld.

- 2. Equipment Attachment
 - a. To securely mount rooftop equipment to the U2400, after it is installed, the connection nut must be fastened to approximately 20 – 25 ft/lb. Use a calibrated torque wrench during installation to ensure appropriate results are achieved.

PLATE LOAD RATING ¹	
Ultimate Load – Sheer	4,339 lb.
Ultimate Load – Tension	2,713 lb.

Tested in accordance with ICC-ES AC467 Section 3.2

¹ Results are based on performance of the bolt and plate assembly only.

DISCLAIMER:

Performance of all U-Anchor products is dependent on the number of fasteners used, fastener capacity, fastener pull out value, and physical properties of all roof assembly components present under the U-Anchor plate.

The installing contractor is solely responsible for installation conditions and load capacities of U-Anchor assemblies. Duro-Last Quality Assurance Technical Representatives will inspect for water-tightness of the Duro-Last Roofing System only.