

ALL-TERM™

DESCRIPTION:

The All-Term™ system may be used as a perimeter flashing for Duro-Last® roofing systems. The system consists of a base and a snap-on metal cover.

- Base and cover are fabricated in 10' lengths; 4" – 13" widths
- Ready-to-assemble inside and outside corners.
- Not sensitive to mil thickness.

ENERGY EFFICIENCY:

- LEED® and ENERGY STAR® compliant.

INSTALLATION:

1. A wood nailer is required if 1" or greater of insulation is used.
2. This nailer should be attached to the wall in accordance with ANSI/SPRI ES-1 3.9.
3. Install in accordance with Detail Drawing 3580.
4. Any deviation from the requirements set forth in detail drawings must be pre-approved, in writing, by the Duro-Last Engineering Services Department.

CODES AND STANDARDS:


- ANSI/SPRI ES-1 Compliant with 4" – 13" base and cover

WARRANTY:

EXCEPTIONAL® Metals offers a finish and substrate warranty. Contact Duro-Last for any additional warranty that may be offered.

TECHNICAL SERVICES:

Product samples, detail sheets, color chips, and color chart are available for your submittal package. For assistance with questions or submittals, contact your local representative or call Duro-Last.

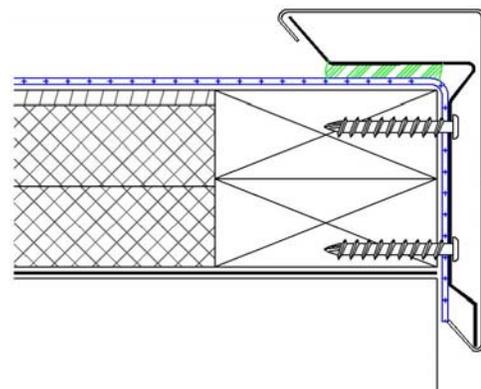

Base		
Material	Gauge	Finish
Aluminum	.050	N/A
Galvalume Plus	22 gauge	N/A

Cover*		
Material	Gauge	Finish
Aluminum	.040	Mill or Kynar®
Stainless Steel	24 gauge	N/A
Bonderized Steel	24 gauge	N/A
Galvalume	24 gauge	Mill or Kynar

* 9" – 13" widths available in .040 aluminum only