

# Parapet Wall Vent

## Description:

The Parapet Wall Vent is engineered for maximum ventilation with pre-punched slots on the bottom along with louvered face.

- Fabricated from 24-gauge vinyl-coated metal and pre-finished Galvalume® 14" wide and 10" tall with a 6" PVC membrane attached skirt.
- Parapet vent provides 44.5 in<sup>2</sup> of net free area.
- Parapet ventilation area for the attic area without vapor retarder is 1 sf (ventilation)/150 sf of attic area.
- Parapet ventilation for new construction attic area that provides a vapor retarder is 1 sf (ventilation) / 300 sf of attic area. **See the IBC for ventilation requirements.**




## Energy Efficiency:

LEED® and ENERGY STAR® compliant.

## Installation:

1. Install in accordance with EXCEPTIONAL® Metals detail drawings #6010 and #6015.
2. Any deviation from the requirements set forth in detail drawings must be pre-approved, in writing, by the EXCEPTIONAL Metals Technical Department.

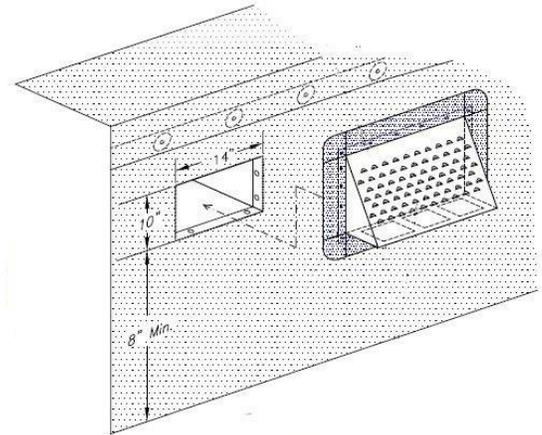

## Warranty:

Duro-Last offers a wide range of warranty coverage for EXCEPTIONAL Metals products when used with the Duro-Last roofing system, including paint and finish.

## Technical Services:

Product samples, detail sheets, color chips, and color chart are available for your submittal package. For assistance with questions or submittals, contact your local representative or call EXCEPTIONAL Metals.

