

## STRIATED INSULATED WALL PANEL

### DESCRIPTION:



The exterior skin of the Striated Insulated Wall Panel is profiled with minor striations, giving it a flat look and providing a linear appearance while blending with the panel side joints. This panel is an excellent alternative to typical flat wall panels. The interior skin has a Light Mesa profile.

### FEATURES:

- The Striated Insulated Wall Panel utilizes concealed clips and eliminates thermal short circuits.
- The standard exterior surface is available in 24 or 22 gauge Galvalume® or Galvanized coated steel with silicone polyester or PVDF coatings.
- IMPs allow for fast assembly times and easy installation, resulting in reduced construction labor costs and earlier business starts.

### SPECIFICATIONS:

- Applications: Wall
- Coverage Widths: 30", 36", 42"
- Thicknesses: 2", 2½", 3", 4"
- Lengths: Recommended maximum is 40'
- Panel Attachment: Concealed fastening system
- Insulation Material: Non-CFC foamed-in-place polyurethane foam cured to achieve a minimum density of 2.2 pounds
- Gauges: Exterior: 24, 22; Interior: 26 (standard), 24, 22 (optional)
- Finishes: Exterior: Stucco-embossed and Interior: Stucco-embossed, Light Mesa profile
- Coatings: Exterior: Signature® 200, Signature® 300, Applied finishes; Interior: Igloo White (standard)
- Accessories: Fasteners, sealants, standard and custom trim

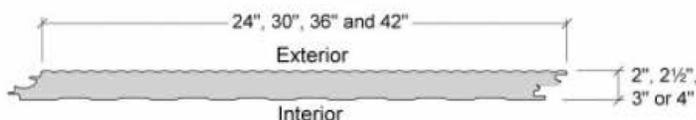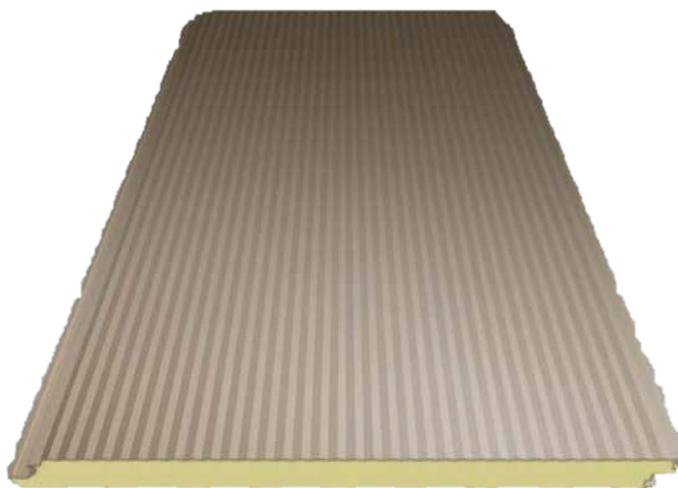

*Product samples, detail sheets, color chips, and color chart are available for your submittal package. For assistance with questions or submittals, contact your local Sale Representative or call Duro-Last.*

**STRIATED INSULATED WALL PANEL**

Category	Characteristic	Test Method	Purpose	Result
<b>ENVIRONMENTAL</b>	Thermal Transmission	ASTM C 518	Measure the heat transmission coefficient per unit thickness (k-factor)	0.140 BTU in/hr ft <sup>2</sup> °F (7.14/inch) at 75° F mean temperature 0.126 BTU in/hr ft <sup>2</sup> °F (7.94/inch) at 40° F mean temperature 0.118 BTU in/hr ft <sup>2</sup> °F (8.47/inch) at 20° F mean temperature
		ASTM C 1363	Measures the resistance to heat flow (or R-value) of a construction assembly in a guarded hot box	Varies up to R-8.515/inch of panel thickness at 40° F mean temperature
	Air Leakage Through Roof Panel Joints	ASTM E 283	Determines the air leakage characteristics of metal wall panels under specified air pressure differences at ambient conditions	0.01 cfm/ft <sup>2</sup> at 20 psf static pressure
	Water Penetration Through Wall Panel Joints	ASTM E 331	Determines the resistance to water penetration of metal wall panels under uniform static air pressure difference	No uncontrolled water penetration through the panel joints at a static pressure of 12 psf
<b>FOAM PROPERTIES</b>	Foam Density	ASTM D 1622	Determines the apparent density of rigid cellular plastics	2.3 pcf
	Foam Compressive Strength	ASTM D 1621	Determines the behavior of cellular materials under compressive load	15 psi through-thickness 22 psi other directions
	Foam Tensile Strength	ASTM D 1623	Measures the tensile strength of the foam from cored sample	30 psi through-thickness 33 psi other directions
	Foam Shear Strength	ASTM C 273	Measures the shear strength of the foam from a cored sample	16 psi lowest in any direction
<b>FIRE RESISTANCE</b>	Surface Burning Characteristics	ASTM E 84	Provides comparative measurements of surface flame spread and smoke density measurements relative to that of select grade red oak and fiber-cement board surfaces under specific fire exposure conditions	Flame Spread index of 20 Smoke Developed index of 350
		FM 4880	Evaluates insulated roof and wall panels, interior finishes or coatings, and exterior wall systems for their performance in regards to fire	Class 1 rating of wall and roof panels for use in unlimited height structures
		NFPA 286	Fire tests for the flammability characteristics of wall and ceiling interior finishes	The panels meet the criteria of the IBC Section 803.1.2.1
	Room Fire Performance	CAN/ULC S101	Standard method of fire endurance tests of building construction and materials	The panels provide 15-minute remain-in-place fire resistance rating
		CAN/ULC S102	Standard method of test for surface burning characteristics of building material and assemblies	Flame Spread Index of 0 Smoke Developed Index of 45 Fuel Contributing Value of 0
		CAN/ULC S134	Standard method of test for fire test of exterior wall assemblies	The panels meet the criteria published in the standard
		CAN/ULC S138	Standard method of test for fire growth of insulated building panels in a full-scale room configuration	The panels meet the criteria published in the standard
	Wall Fire Performance	NFPA 285	Evaluation of fire propagation characteristics of exterior non-load bearing wall assemblies in regard to fire	Panels meet the requirement of the standard
<b>STRUCTURAL</b>	Uplift Resistance	ASTM E 72 ASTM E 300	Provides a standard procedure to evaluate or confirm structural performance under uniform static air pressure difference	See Load Chart Section*
	Positive Load Resistance	ASTM E 72	Tests the behavior of segments of wall construction under conditions representative of those encountered in service	See Load Chart Section*
<b>WALL LISTINGS</b>	Roof Performance FM Global	FM 4881	Sets performance standards for panel walls including wind load resistance and hail resistance Requires a Class 1 rating by FM Global Standard 4880 as a prerequisite	See FM Global Approval Guide for Building Products complete listings