


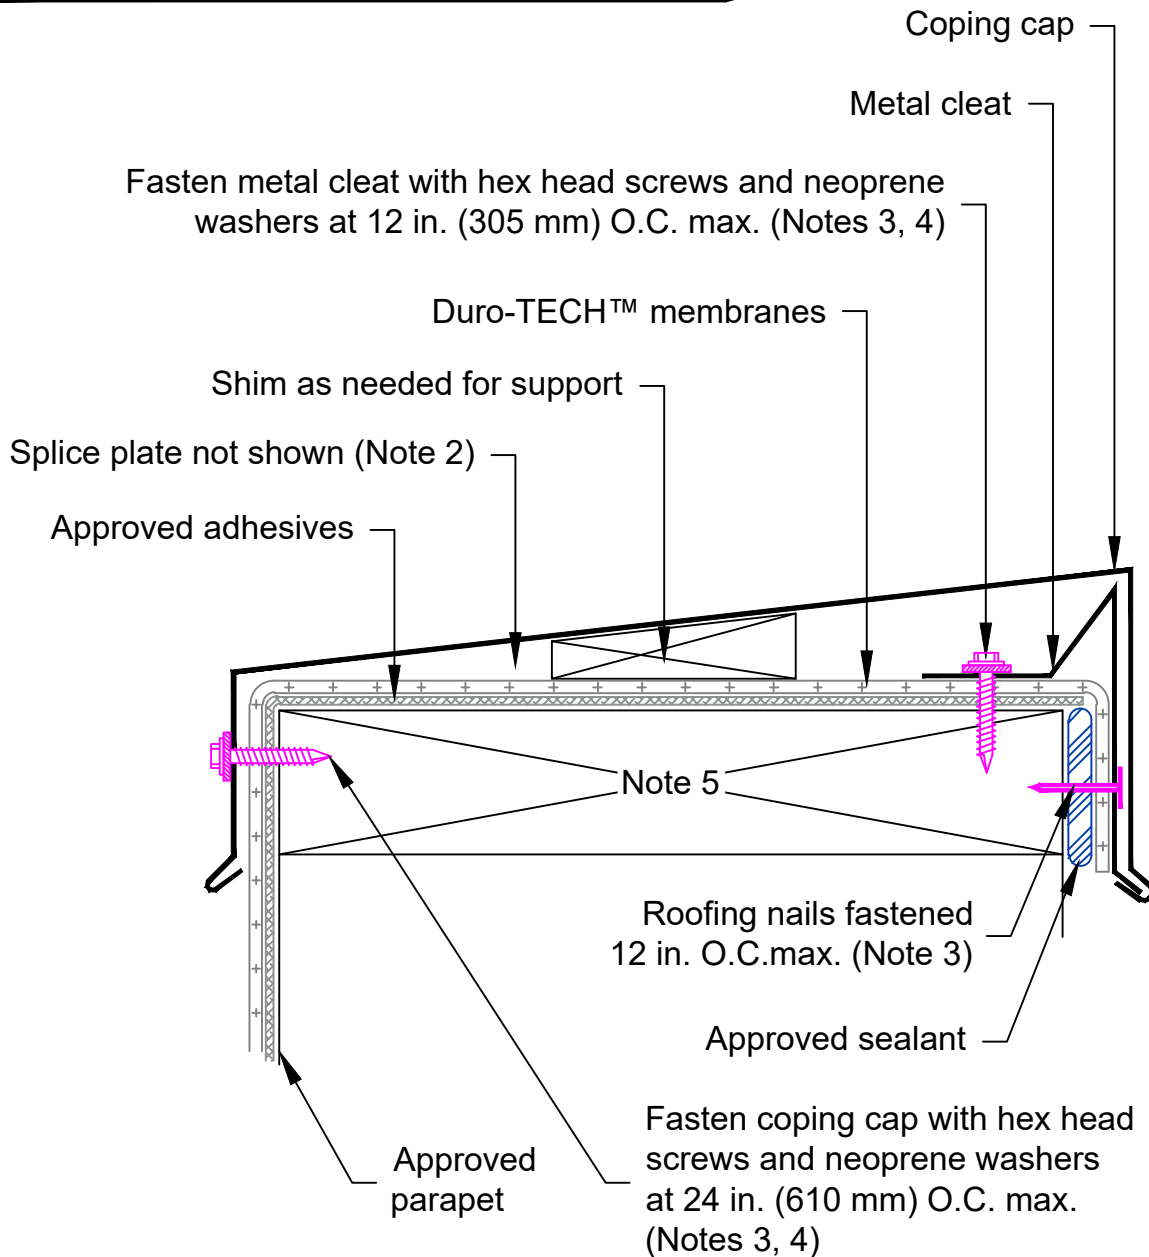

Note 1: All coping cap joints must utilize a 6 in. (152 mm) concealed splice plate.

Note 2: Refer to Detail T6053 for splice plate installation instructions.

Note 3: All fasteners must penetrate into nailer by a minimum of 1-1/2 in. (40 mm).

Note 4: Fasten other manufacturers' products according to their specifications.

Note 5: Refer to General Requirements for wood nailer requirements.

|                      |                                                   |
|----------------------|---------------------------------------------------|
| REVISED: N/A         | TPO PARAPET DETAIL FOR ADHERED NON FLEECE SYSTEMS |
| PREVIOUS: 07/29/2026 | CANTED COPING WITH CONTINUOUS CLEAT               |
| SCALE: NONE          | NEW CONSTRUCTION OR RE-ROOF                       |