

# T-EDGE

## DESCRIPTION:

T-Edge provides a drip edge finish and easy deck termination. The system consists of three separate components: a drip edge, hook strip and splice plate that are hooked together to form an aesthetically-pleasing edge.


- Fabricated in 10' lengths; 2" – 8" widths.
- Can be modified to accommodate various pitches and bend up to a 6/12 slope.
- Top piece consists of a vinyl-coated hook strip with a 6" attached PVC membrane skirt. Bottom drip edge piece available in any metal finish.
- Does not require an overlapping allowance.
- Ready to assemble inside and outside corners are available.
- ANSI/SPRI ES-1 compliant for 3" – 8" in 24-gauge galvanized and .040 aluminum.
- Meets TAS 111-95 Test for 4".
- LEED® compliant.

## INSTALLATION:

1. A wood nailer is required if 1" or greater of insulation is used.
2. The nailer should be attached to the wall in accordance with ANSI/SPRI ES-1 3.9.
3. Install in accordance with Duro-Last Detail #3550.
4. Any deviation from the requirements set forth in detail drawings must be pre-approved, in writing, by the Duro-Last Technical Department.

## WARRANTY:

Duro-Last offers a finish and substrate warranty.

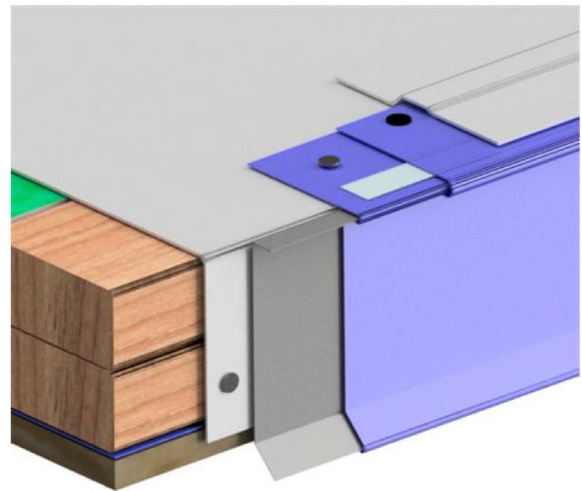

Material	Gauge	Finish
Aluminum	.040	Mill or Kynar®
Stainless Steel	24-gauge	N/A
Bonderized Steel	24-gauge	N/A
Galvalume®	24-gauge	Mill or Kynar®