


HD SCREWS

DESCRIPTION

Duro-Last® approves #14 HD Screws for mechanical fastening of the Duro-Last roofing system. HD Screws are #14 diameter, have a P-3 truss head, and are available with either a spade point or a drill point.

Duro-Last HD Screws can be used in most roofing applications, being able to penetrate a 20-gauge deck in under 3 seconds with a 50 lbf (222.41 N) load.

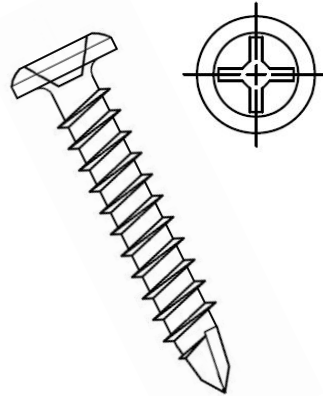

STORAGE AND HANDLING

Always store in a dry location protected from the elements.

INSTALLATION

Duro-Last requires that all deck fasteners penetrate at least 1 inch (25 mm) beyond the surface of the deck.

HD SCREW ORDERING				
(Screws must be ordered per pail. Additional lengths available upon request.)				
Length Inch (mm)	Thread Length Inch (mm)	Quantity per Pail	Spade Point Item Number (Must order per pail)	Drill Point Item Number (Must order per pail)
1.5 (38)	1.5 (38)	2,000	1442-2	1361-2
2 (51)	2 (51)	2,000	1446-2	1362-2
2.5 (64)	2.5 (64)	1,000	1456	1363
3 (76)	3 (76)	1,000	1447	1364
3.5 (89)	3 (76)	1,000	1457	1365
4 (102)	3 (76)	1,000	1448	1366
4.5 (114)	3 (76)	1,000	1458	1367
5 (127)	4 (102)	1,000	1449	1368
5.5 (140)	4 (102)	1,000	1459	1369
6 (152)	4 (102)	1,000	1450	1370
7 (178)	4 (102)	500	1451	1371
8 (203)	4 (102)	500	1452	1372
9 (229)	4 (102)	500	1253	1373
10 (254)	4 (102)	500	1254	1374
11 (279)	4 (102)	500	1255	1375
12 (305)	4 (102)	500	1256	1376
14 (356)	4 (102)	250	N/A	1377
16 (406)	4 (102)	250	N/A	13770
18 (457)	4 (102)	250	N/A	13771