
DURO-LAST®
THE WORLD'S BEST ROOF®

DETAIL TAS3010

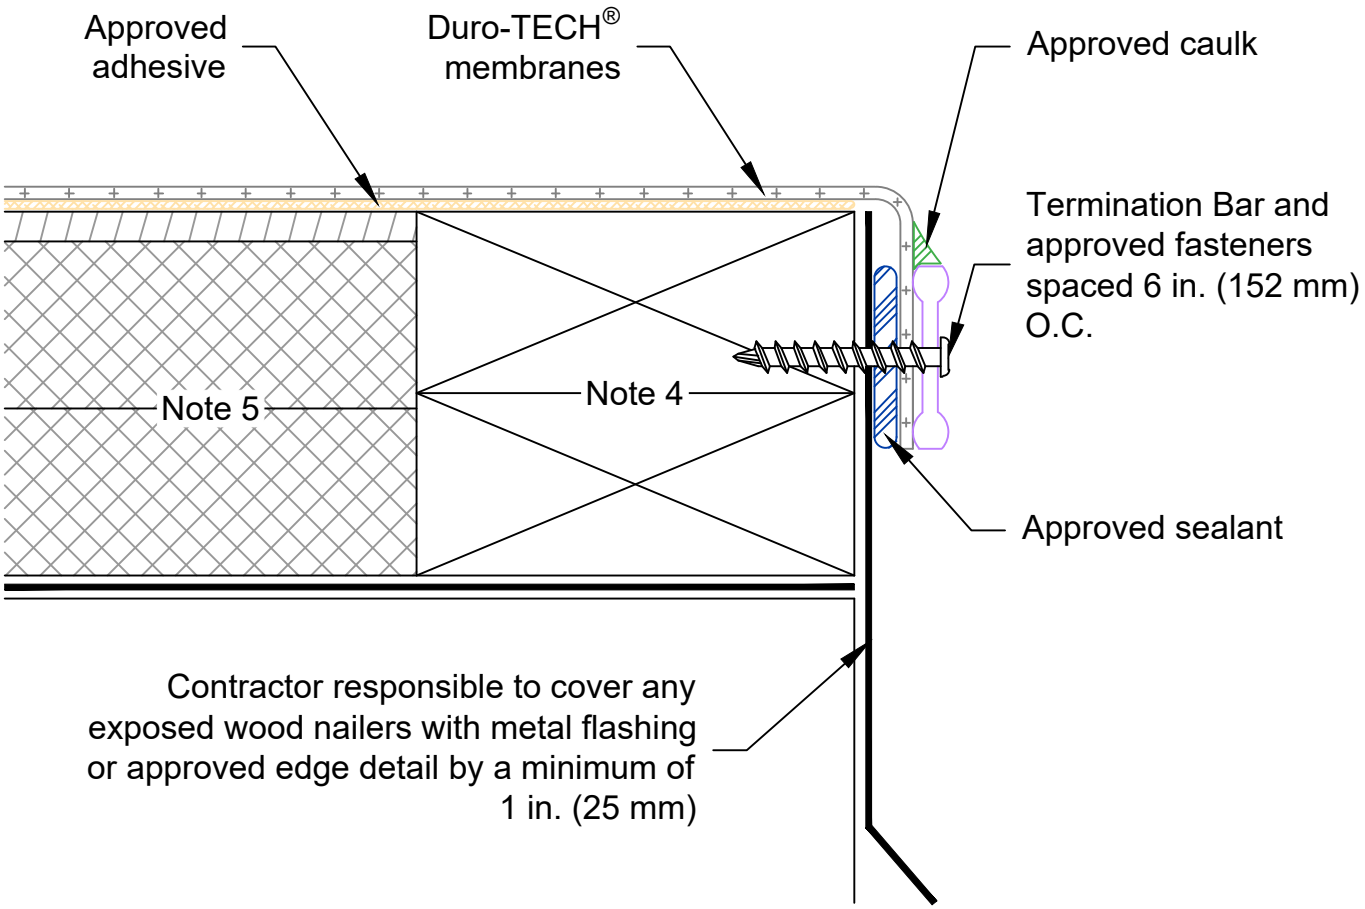

Note 1: This detail may also be used on parapet walls.

Note 2: A 1/4 in. (6 mm) gap is required between sections of Termination Bar.

Note 3: All vertical applications require approved caulk to be applied on both sides of the Termination Bar.

Note 4: Refer to General Requirements for wood nailer requirements.

Note 5: Refer to specifications for vapor barrier, insulation, cover board, and deck requirements.

REVISED: 0\8/07/2026	TPO EDGE DETAIL FOR ADHERED NON-FLEECE SYSTEMS
CREATED: 09/26/2025	TERMINATION BAR
SCALE: NONE	NEW CONSTRUCTION OR RE-ROOF