
DETAIL TAS3020

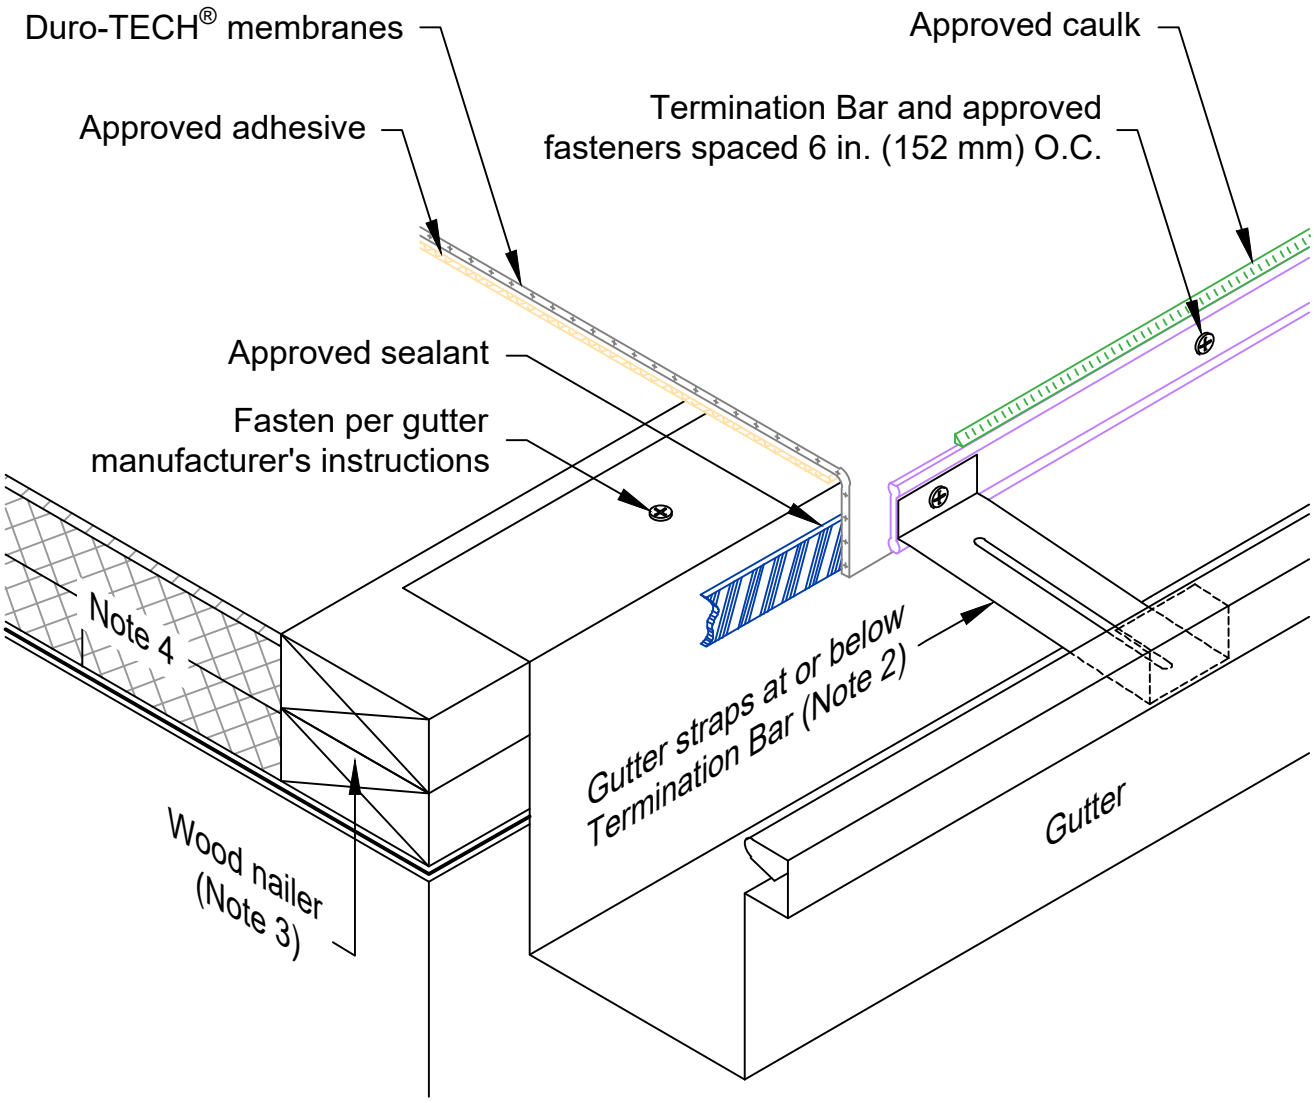

Note 1: A 1/4 in. (6.4 mm) gap is required between sections of Termination Bar.

Note 2: Gutter strap spacing per gutter manufacturer's instructions.

Note 3: Refer to General Requirements for wood nailer requirements.

Note 4: Refer to specifications for vapor barrier, insulation, cover board, and deck requirements.

REVISED:	08/07/2026	TPO EDGE DETAIL FOR ADHERED NON-FLEECE SYSTEMS
CREATED:	09/26/2025	TERMINATION BAR INTO GUTTER
SCALE:	NONE	NEW CONSTRUCTION OR RE-ROOF