
DURO-LAST®
THE WORLD'S BEST ROOF®

DETAIL TAS3040

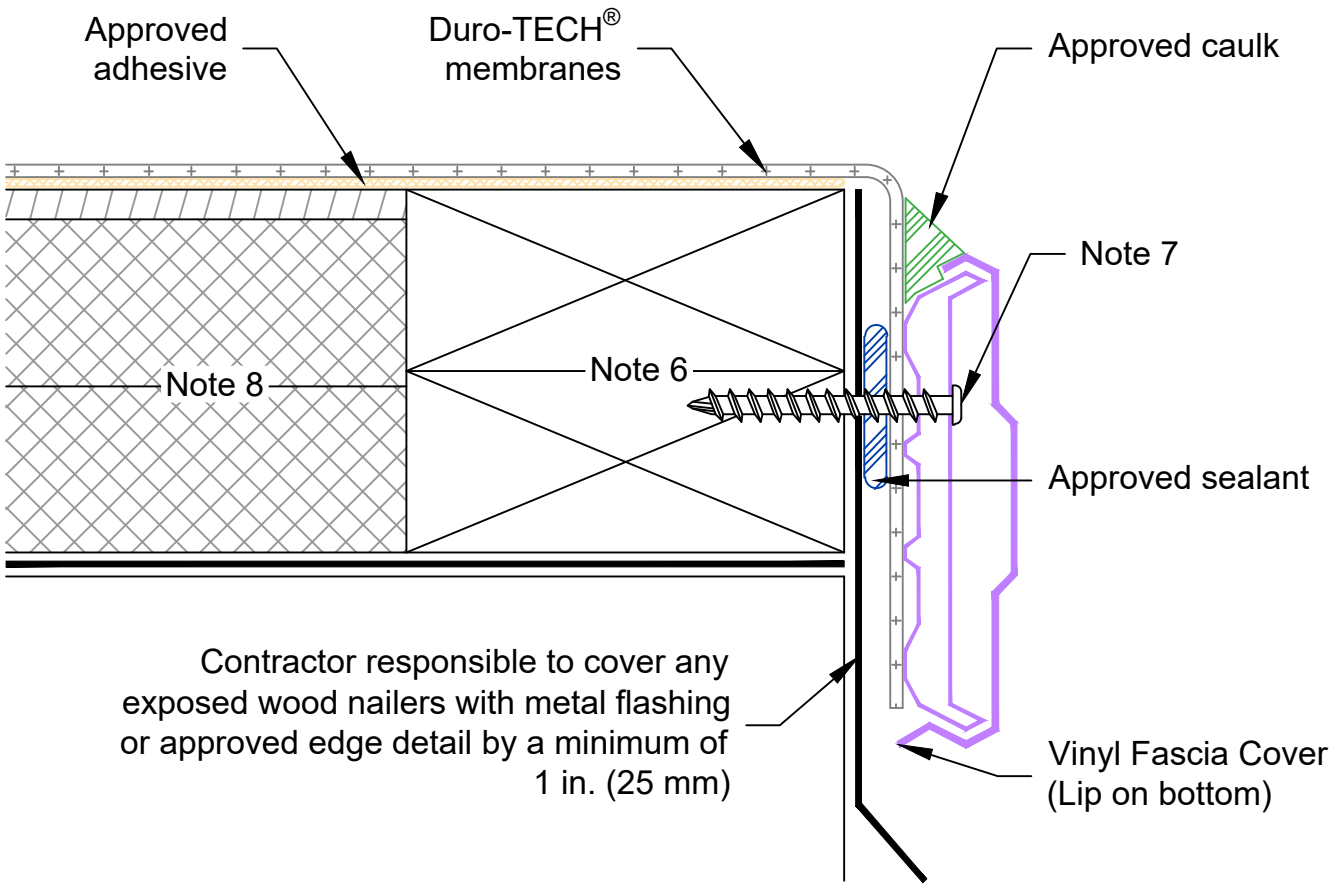

Note 1: This detail may also be used on parapet walls.

Note 2: A 1/4 in. (6 mm) gap is required between sections of vinyl Fascia Bar. A 1 in. (25 mm) gap is required between sections of vinyl Fascia Cover.

Note 3: Joints in vinyl Fascia Bar must be offset by a minimum of 12 in. (305 mm) from joints in the vinyl Fascia Cover. Use Fascia Clips to cover each vinyl Fascia Cover joint.

Note 4: All vertical applications require approved caulk to be applied on both sides of the Fascia System.

Note 5: The Fascia System is not to be used as a gravel/water stop.

Note 6: Refer to General Requirements for wood nailer requirements.

Note 7: Fascia Bar and approved fasteners spaced 6 in. (152 mm) on center using any of the 3 pre-punched rows. Fasteners may be staggered within the 3 rows.

Note 8: Refer to specifications for vapor barrier, insulation, cover board, and deck requirements.

REVISED:	08/07/2026	TPO EDGE DETAIL FOR ADHERED NON-FLEECE SYSTEMS
CREATED:	09/26/2025	4-INCH VINYL FASCIA SYSTEM
SCALE:	NONE	NEW CONSTRUCTION OR RE-ROOF