

ALLTERM®

DESCRIPTION:


The AllTerm® system may be used as a perimeter flashing for single-ply roofing systems. The system consists of a base and a snap-on metal cover.

- Base and cover are fabricated in 10' lengths; 4" – 13" widths.
- Ready-to-assemble inside and outside corners.
- Not sensitive to mil thickness.
- LEED® compliant.



INSTALLATION:

1. A wood nailer is required if 1" or greater of insulation is used.
2. Nailer should be attached to the wall in accordance with ANSI/SPRI ES-1 3.9.
3. Install in accordance with Duro-Last Detail #3580.
4. Any deviation from the requirements set forth in detail drawings must be pre-approved, in writing, by the Duro-Last Technical Department.

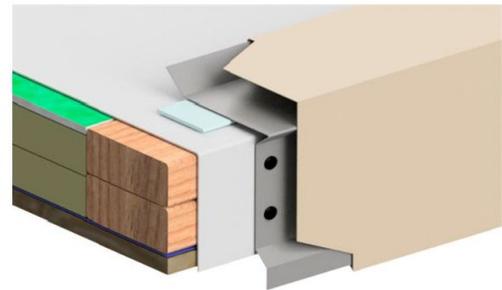

CODES AND STANDARDS:

- ANSI/SPRI ES-1 compliant with 4" – 13" base and cover.

WARRANTY:

Duro-Last offers a finish and substrate warranty.

Base		
Material	Gauge	Finish
Aluminum	.050	N/A
Galvalume® Plus	22-gauge	N/A

Cover*		
Material	Gauge	Finish
Aluminum	.040	Mill or Kynar®
Stainless Steel	24-gauge	N/A
Bonderized Steel	24-gauge	N/A
Galvalume®	24-gauge	Mill or Kynar®