
DURO-LAST®
THE WORLD'S BEST ROOF®

DETAIL TAS2011

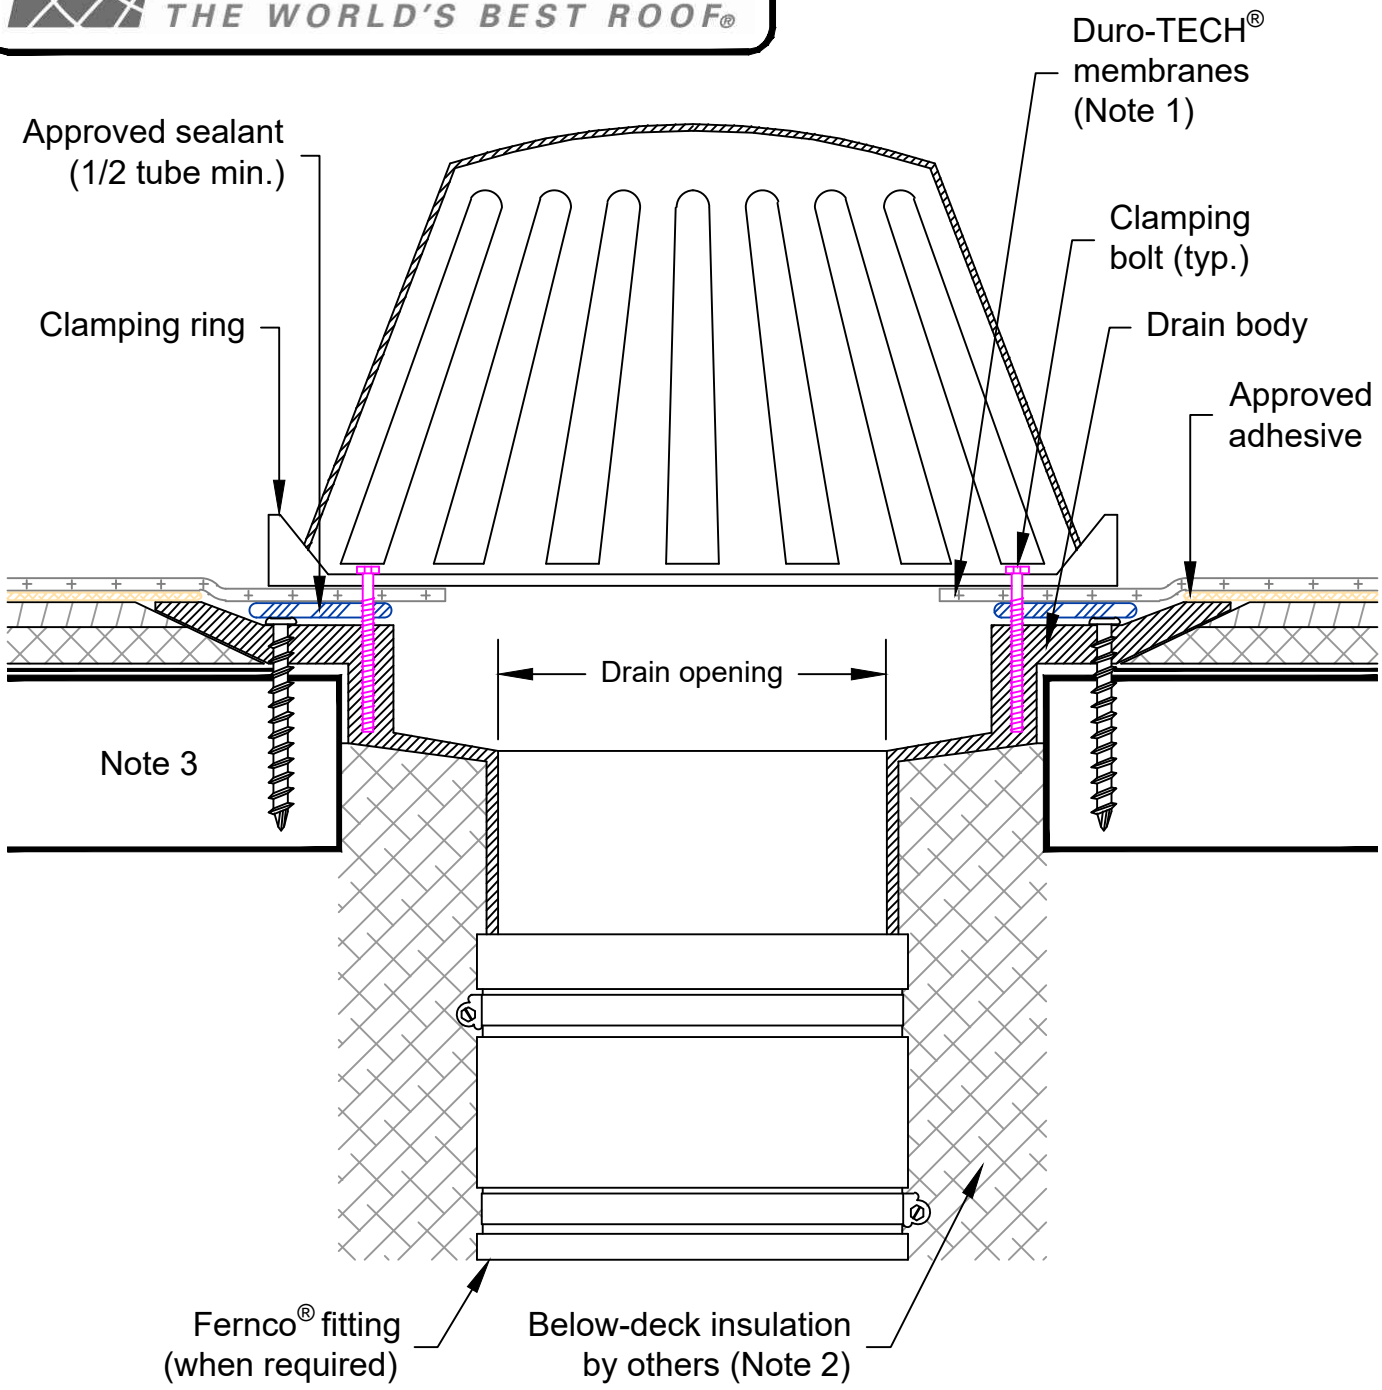

Note 1: Membrane must extend beyond the inside of the clamping ring. The hole in the membrane must be larger than the drain pipe diameter.

Note 2: The designer should consider insulating the drain components below the deck to prevent potential condensation.

Note 3: Refer to specifications for vapor barrier, insulation, cover board, and deck requirements.

REVISED:	08/10/2026	TPO DRAINAGE DETAIL FOR ADHERED NON-FLEECE SYSTEMS
CREATED:	09/26/2025	DURO-LAST® PVC CLAMPING RING ROOF DRAIN
SCALE:	NONE	NEW CONSTRUCTION OR RE-ROOF