
DETAIL TRG1062

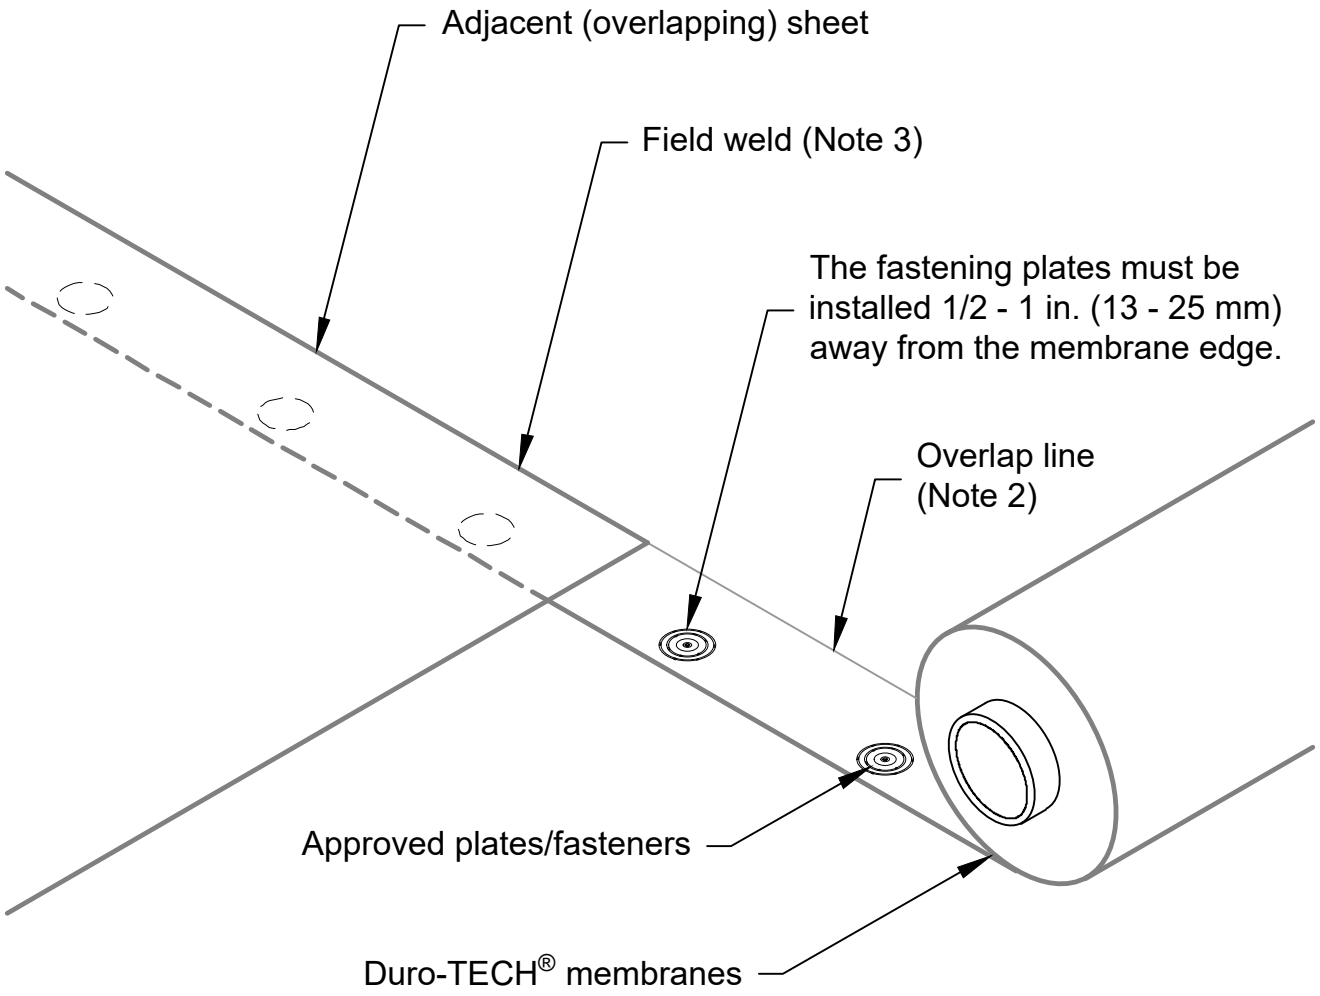

Note 1: Proper fastener spacing can be determined using the Fastener Spacing Tables in the *Duro-TECH TPO Mechanically Fastened Roofing System* specification.

Note 2: The membranes will have an overlap line located 6 in. (152 mm) from the edge of the sheet, and X's or dots placed at 6 in. (152 mm) intervals for ease of fastener placement.

Note 3: All field welds must be a minimum of 1-1/2 in. (40 mm) wide.

REVISED: N/A	TPO GENERAL DETAIL FOR ROLL GOOD MECHANICALLY FASTENED SYSTEMS
CREATED: 10/23/2026	FASTENER PLACEMENT AND SHEET OVERLAP
SCALE: NONE	NEW CONSTRUCTION OR RE-ROOF