

UNIVERSAL 2-PIECE COMPRESSION EDGE LG

DESCRIPTION:


The Universal 2-Piece Compression Edge LG (Large Face) system may be used as a perimeter flashing for single-ply roofing systems. The system consists of a 22-gauge Galvalume® base and a snap-on aluminum cover.

- Base and cover is fabricated in 10' lengths and 9" to 13" widths.
- Cover is double-hemmed to prevent roof material from chafing.
- Bird beak strengthening bend on base.
- Pre-punched holes in base.
- Ready to assemble inside and outside corners are available.
- LEED® compliant.
- ANSI/SPRI ES-1 compliant.



INSTALLATION:

- A wood nailer is required if 1" or greater of insulation is used.
- The wood nailer should be attached in accordance with ANSI/SPRI ES-1.
- Install in accordance with Duro-Last Detail Drawing #3115.
- Any deviation from the requirements set forth in detail drawings must be pre-approved, in writing, by the Duro-Last Technical Department.

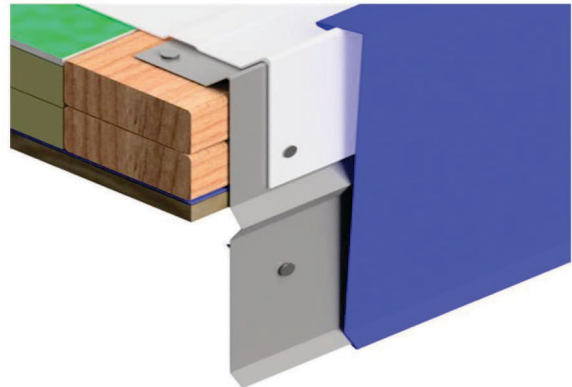

WARRANTY:

Duro-Last offers a finish and substrate warranty.

Material	Gauge	Finish
Aluminum	.040 in.	Mill or Kynar®