

PBC ROOF AND WALL PANEL

DESCRIPTION:



The PBC Roof and Wall Panel can be used for both roof and wall applications. PBC panels are attached to a building structure with exposed fasteners, and are often used in horizontal applications on walls.

FEATURES:

- UL 790 external fire rating is available.

SPECIFICATIONS:

- Applications: Roof and Wall
- Coverage Widths: 32"
- Rib Spacing: 2.67" on-center
- Rib Height: 7/8"
- Minimum Slope: 3:12
- Panel Attachment: Exposed Fastening System
- Gauges: 26 (standard); 29, 24, 22 (optional)
- Finishes: Smooth (standard); Embossed (optional)
- Coatings: Galvalume® Plus, Signature® 200, Signature® 300

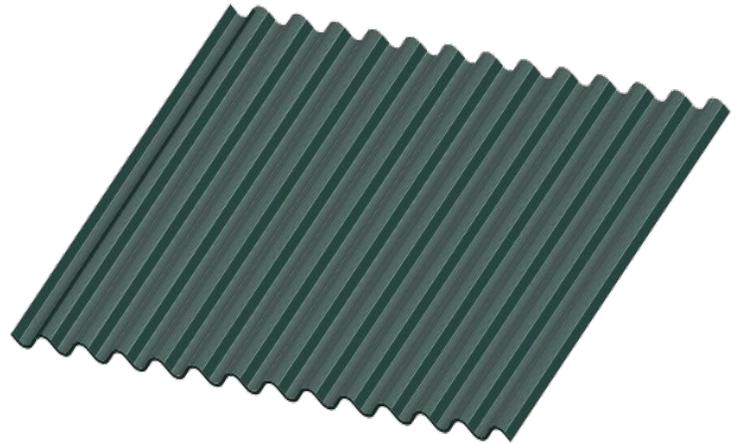

Product samples, detail sheets, color chips, and color chart are available for your submittal package. For assistance with questions or submittals, contact your local Sale Representative or call Duro-Last.

Category	Characteristic	Test Method	Purpose	Result
STRUCTURAL	Negative Wind Loads	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section*
	Gravity Loads	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section*