

DURO-LAST® SB-240 MASTIC


DESCRIPTION:

Duro-Last®, Inc. supplies trowelable mastic for use with the Duro-Last roofing system. SB-240 is a medium-weight solvent-release mastic that utilizes synthetic rubber and resins as base products which provide excellent water-resistant properties and adhesion.

SB-240 is moisture-resistant, which is most important with today's high tech single-ply materials. SB-240 is normally used as an underseal. This product cannot be used as a splicing cement, pitch pocket filler, night seal or perimeter flashing adhesive. It is not contact cement, but a sealant.

SB-240 is formulated for adhesion to all types of building materials including masonry, wood, metal, insulation, and galvanized flashing. Its high tack ensures a weather-tight seal around penetrations.

SB-240 is odorless and easy to use. Cleanup is easily accomplished with mineral spirits or naphtha.

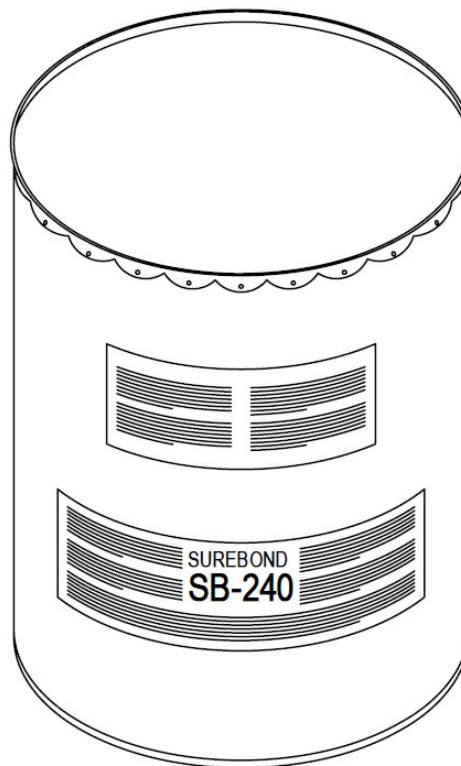

MATERIAL SAFETY DATA SHEET:

Product Name: SB-240 Single Ply Roofing Mastic

INSTALLATION:

1. SB-240 can be used for back-seal, scuppers, drains, flashing details and under the membrane.
2. In no instance shall the SB-240 be used in such a way that it would be subject to permanent exposure to ultraviolet radiation.

NOTE:

- Use extreme caution when using solvents for any cleanup.
- SB-240 is available in five gallon pails, which will seal approximately 450 ft.² (42 m²) of Duro-Last membrane.
- SB-240 must be installed in accordance with current Duro-Last, Inc. specifications.

SB-240 MASTIC PROPERTIES	
Color	Gray
Base	Synthetic rubber and resin
Viscosity	Medium weight
Type	Solvent release
Storage	Above 40° F (4° C) and below 90° F (32° C)