


FASCIA COVER

DESCRIPTION:

The 1 3/4" and 4" Fascia Cover provides a professional finish without perimeter welding. The Fascia Cover is to be used in conjunction with the Duro-Last vinyl 1 3/4" and 4" Fascia Bar.

- Manufactured in 10' lengths; 1 3/4" and 4" widths.
- End-notched to provide trouble-free piece-to-piece interlocking.
- Also available in a flat-face profile.
- Ready-to-assemble inside and outside corners are available in the standard and flat-face profiles.
- LEED® compliant.
- ANSI/SPRI ES-1 compliant with 24-gauge Galvalume® and .040 aluminum Fascia Cover.
- Meets TAS 111-95 Test with 4-inch Fascia Cover.
- FM Approved.

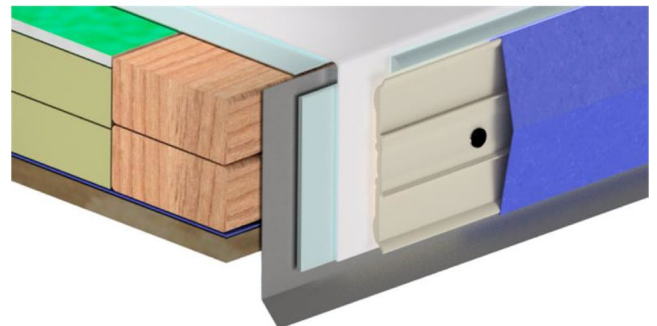

Product shown with 4-inch Fascia

INSTALLATION:

1. A wood nailer is required if 1" or greater of insulation is used.
2. The wood nailer should be attached in accordance with ANSI/SPRI ES-1.
3. Install Fascia Cover in accordance with Duro-Last Detail Drawings #3110, #3500 and #3510.
4. Any deviation from the requirements set forth in detail drawings must be pre-approved, in writing, by the Duro-Last Technical Department.

WARRANTY: DuroLast offers a finish and substrate warranty.

Material	Gauge	Finish
Aluminum	.040 in.	Mill or Kynar®
Stainless Steel	24-gauge	N/A
Bonderized Steel	24-gauge	N/A
Galvalume®	24-gauge	Mill or Kynar®
Copper	16 oz.	Mill