

# DURO-TECH™ TPO 60-MIL MEMBRANE

## DESCRIPTION:

Duro-TECH™ TPO 60-Mil ("TPO60") is a flexible thermoplastic polyolefin ("TPO") roofing membrane made for use in Duro-TECH TPO roofing systems. TPO60 meets or exceeds all requirements for ASTM D6878.

TPO60 is available as roll goods and can be custom-fabricated as accessories.

TPO60 is a TPO membrane which incorporates a polyester reinforcement fabric (weft-inserted scrim) within TPO films to provide exceptional strength and waterproofing.

### TPO products are not compatible with PVC products.

**TPO Film** – Proprietary TPO formulation of resins, thermal, and UV stabilizers, and flame retardants.

- TPO film above scrim – 30 mil (0.76 mm).

**Weft-Inserted Scrim** – A 9 x 9 polyester fabric construction with weft insertion, provides superior tear and puncture resistance. The polyester thread is treated to prevent wicking.

**Total Thickness** – 60 mil (1.52 mm), nominal.



**Weight** – 0.31 lb/ft<sup>2</sup> (1.51 kg/m<sup>2</sup>).

**Colors** – White, tan, and gray.

- The thicker-above-scrim film layer must always be installed on top.

ROLL PROPERTIES		
Dimensions ft (m)	Approximate Coverage w/6-In. (152-mm) Overlap ft <sup>2</sup> (m <sup>2</sup> )	Approximate Weight lb (kg)
10-in. x 100 (0.3 x 30.5)	58 (5.4) (no overlap)	25.83 (11.72)
2.5 x 100 (0.8 x 30.5)	199 (18.5)	77.50 (35.15)
5 x 100 (1.5 x 30.5)	447 (41.5)	155 (70.31)
10 x 100 (3 x 30.5)	945 (87.8)	310 (140.61)

**Overlap Line** – A line, 6 inches (152 mm) from the edge of the sheet, is factory-applied to the top of the sheet to assist in maintaining proper overlap between sheets.

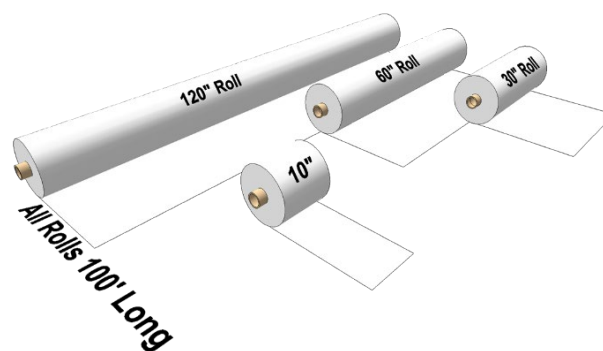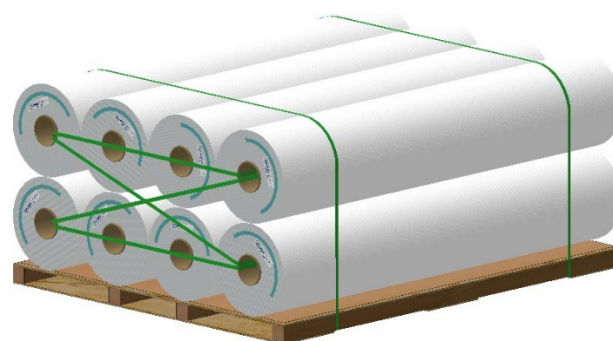

**Seam Plate and Fastener Placement Guides** – "X"s is placed at 6-inch (152-mm) intervals along one edge of the sheet to assist in maintaining proper spacing between fasteners. Install fasteners so that the outside edge of the seam plate is inset 1/2 inch (13 mm) from the edge of the sheet.

**"T-Lap" Patches** – A patch, with rounded corners, is required at all lap areas where three or more layers of membrane intersect ("T-Lap"). The minimum size of the patch is 4 x 4 inches (102 x 102 mm) or 4-inch (102-mm) diameter. Patches can be made with a maximum of 45-mil Duro-TECH TPO membrane or Duro-TECH TPO Unsupported T-Joint Covers. Refer to Detail T1195.

### Energy Efficiency:

White TPO60 is an excellent product for complying with California Title 24, LEED®, and other energy efficiency programs requiring the use of a highly reflective roof membrane.

COOL ROOF RATING COUNCIL (CRRC)							
COLORS	CRRC ID	Solar Reflectance		Thermal Emittance		Solar Reflective Index (SRI)	
		Initial	3-yr	Initial	3-yr	Initial	3-yr
White	0610-0023	0.79	0.69	0.85	0.83	98	83
Tan	P <sup>1</sup>	0.73	0.66	0.90	0.91	90	81
Gray	P <sup>1</sup>	0.34	0.34	0.89	0.88	37	36

**LEED-NC & LEED-EB Credits** – White TPO60 alone can obtain one credit in either U.S. Green Building Council's LEED-NC or LEED-EB programs. In combination with other design criteria, the membrane may help attain other credits.

LEED-NC Credit Category	Duro-TECH Attribute
Sustainable Sites Heat Island Reduction	Solar Reflective Index (SRI) = 98
LEED-EB Credit Category	Duro-TECH Attribute
Sustainable Sites Heat Island Reduction	Solar Reflective Index (SRI) = 98

#### WARRANTY:

The following warranties are available for projects utilizing TPO60. Contact Duro-Last for warranty details.

AVAILABLE DURO-TECH 60-MIL WARRANTIES		
TYPE	15-YEAR	20-YEAR
Supreme	NOT APPLICABLE	
Ultra	15-Year High Wind TPO	20-Year High Wind TPO
	15-Year Hail TPO	
	15-Year Hail and High Wind TPO	
Basic	15-Year NDL TPO	20-Year NDL TPO
	15-Year Material Only TPO	20-Year Material Only TPO
Residential	15-Year Residential TPO	20-Year Residential TPO

#### CODES AND STANDARDS:

Underwriters Laboratories (US & Canada)<sup>1</sup>, NEMO CERT Evaluation Report<sup>1</sup>, FM Approvals<sup>1</sup>, Canadian Construction Materials Centre<sup>1</sup>, State of Florida<sup>1</sup>, Miami-Dade County<sup>1</sup>, Texas Department of Insurance (TDI)<sup>1</sup>.

<sup>1</sup> Pending

#### STORAGE:

Keep away from ignition sources.

Store rolls lengthwise on pallets. Use tarps to keep rolls dry.

#### PRECAUTIONS:

Keep away from ignition sources.

Wear proper personal protective equipment, such as gloves and eye protection, per the SDS.

#### MEMBRANE ATTACHMENT:

**Mechanically Fastened** – TPO60 may be mechanically fastened to a variety of roof deck and wall materials. An appropriate slip sheet, insulation, or cover board may be required. Refer to the Duro-TECH TPO Mechanically Fastened Roofing System Specification for system requirements.

**Induction Welded** – Induction welding may be used to attach TPO60. An appropriate slip sheet, insulation, or cover board may be required. Refer to the Duro-TECH TPO Induction Weld Roofing System Specification for system requirements.

**Adhered** – TPO60 may be adhered to a variety of properly prepared roof decks, walls, insulations, or cover boards. Refer to the Duro-TECH TPO Adhered Roofing System Specification for system requirements.

**PHYSICAL PROPERTIES:**

TPO60 has been subjected to the tests required by ASTM D6878 “Standard Specification for Thermoplastic Polyolefin Based Sheet Roofing”. The results of each test are listed below. ASTM’s Overall Thickness requirements for the membrane are plus or minus 10% (nominal) of the listed Typical Value.

PHYSICAL PROPERTIES				
Physical Property	Test Method	ASTM D6878 Requirement	Result	Typical Value
Overall Thickness	ASTM D751	$\geq 54$ and $\leq 66$ mil ( $\geq 1.37$ and $\leq 1.68$ mm)	PASS	60 mil (1.52 mm) nominal
Thickness Over Scrim	ASTM D7635	$\geq 15$ mil ( $\geq 0.38$ mm)	PASS	30 mil (0.76 mm)
Breaking Strength	ASTM D751 grab method	$\geq 220$ lbf ( $\geq 978.6$ N)	PASS	390 lbf (1,734.8 N)
Elongation at Reinforcement Break	ASTM D751 grab method	$\geq 15\%$	PASS	25%
Tear Strength	ASTM D751	$\geq 55$ lbf ( $\geq 244.7$ N)	PASS	120 lbf (533.8 N)
Brittleness Point	ASTM D2137	Must pass at $-40^{\circ}$ F ( $-40^{\circ}$ C)	PASS	PASS
Ozone Resistance, No Cracks	ASTM D1149	PASS (no cracks)	PASS	PASS
Properties After Heat Aging (Retained Values) ASTM D573 – 5,376 Hours (224 Days or 32 Weeks) at $240^{\circ}$ F ( $115.6^{\circ}$ C)				
Breaking Strength	ASTM D751 grab method	90% min	PASS	> 90%
Elongation at Reinforcement Break	ASTM D751 grab method	90% min	PASS	> 90%
Tear Strength	ASTM D751	60% min	PASS	> 60%
Weight of Change	–	$\pm 1\%$ max	PASS	< 1%
Linear Dimension Change	ASTM D1204 6 hours at $158^{\circ}$ F ( $70^{\circ}$ C)	$\pm 1\%$ max	PASS	< 1%
Water Absorption	ASTM D471	$\pm 3\%$ max	PASS	< 3%
Weather Resistance	ASTM G155 $176^{\circ}$ F ( $80^{\circ}$ C) Black Panel, no cracking, crazing when wrapped around a 3-inch (76.2-mm) mandrel and inspected at 7X magnification	10,800 kJ/m <sup>2</sup> min	PASS	> 60,000 kJ/m <sup>2</sup>
Puncture	FTM 101C method 2031	–	PASS	300 lbf (1,334.5 N)
Dynamic Puncture	ASTM D5635	–	PASS	50 J
Static Puncture	ASTM D5602	–	PASS	55 lb (24.95 kg)
Air Permeance (Material)	ASTM E2178	0.004 ft <sup>3</sup> /ft <sup>2</sup> max (0.02 L/(s*m <sup>2</sup> ))	PASS	PASS

**APPROVALS:**